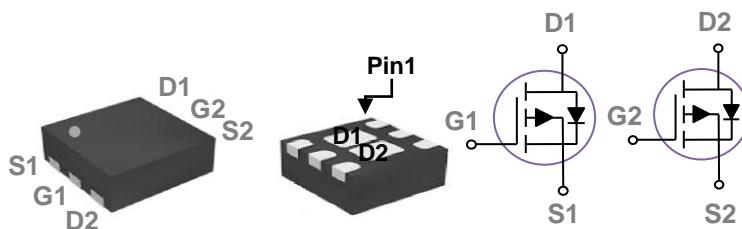


General Description

These dual P Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

DFN2X2 Dual 2EP Pin Configuration



| BVDSS | RDS(ON) | ID |
|-------|---------|-----|
| -20V | 90mΩ | -3A |

Features

- -20V, -3A, RDS(ON) = 90mΩ@VGS = -4.5V
- Improved dv/dt capability
- Fast switching
- Green Device Available
- Suit for -1.8V Gate Drive Applications

Applications

- Notebook
- Load Switch
- Hand-Held Instruments

Absolute Maximum Ratings $T_c=25^\circ\text{C}$, unless otherwise noted

| Symbol | Parameter | Rating | Units |
|------------------|-------------------------------------------------------|------------|-------|
| V _{DS} | Drain-Source Voltage | -20 | V |
| V _{Gs} | Gate-Source Voltage | ± 10 | V |
| I _D | Drain Current – Continuous ($T_A=25^\circ\text{C}$) | -3 | A |
| | Drain Current – Continuous ($T_A=70^\circ\text{C}$) | -2.4 | A |
| I _{DM} | Drain Current – Pulsed ¹ | -12 | A |
| P _D | Power Dissipation ($T_A=25^\circ\text{C}$) | 1.25 | W |
| | Power Dissipation – Derate above 25°C | 0.01 | W/°C |
| T _{STG} | Storage Temperature Range | -55 to 150 | °C |
| T _J | Operating Junction Temperature Range | -55 to 150 | °C |

Thermal Characteristics

| Symbol | Parameter | Typ. | Max. | Unit |
|------------------|----------------------------------------|------|------|------|
| R _{θJA} | Thermal Resistance Junction to ambient | --- | 100 | °C/W |

Electrical Characteristics ($T_J=25\text{ }^\circ\text{C}$, unless otherwise noted)
Off Characteristics

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|------------------------------|------------------------------------|-----------------------------------------------------------------------------|------|------|-----------|---------------------|
| BV_{DSS} | Drain-Source Breakdown Voltage | $V_{GS}=0\text{V}$, $I_D=-250\mu\text{A}$ | -20 | --- | --- | V |
| $\Delta BV_{DSS}/\Delta T_J$ | BV_{DSS} Temperature Coefficient | Reference to $25\text{ }^\circ\text{C}$, $I_D=-1\text{mA}$ | --- | 0.01 | --- | V/C |
| I_{DSS} | Drain-Source Leakage Current | $V_{DS}=-20\text{V}$, $V_{GS}=0\text{V}$, $T_J=25\text{ }^\circ\text{C}$ | --- | --- | -1 | μA |
| | | $V_{DS}=-16\text{V}$, $V_{GS}=0\text{V}$, $T_J=125\text{ }^\circ\text{C}$ | --- | --- | -10 | μA |
| I_{GSS} | Gate-Source Leakage Current | $V_{GS}=\pm 10\text{V}$, $V_{DS}=0\text{V}$ | --- | --- | ± 100 | nA |

On Characteristics

| | | | | | | |
|----------------------------|---------------------------------------------|-------------------------------------------|------|------|------|----------------------|
| $R_{DS(\text{ON})}$ | Static Drain-Source On-Resistance | $V_{GS}=-4.5\text{V}$, $I_D=-3\text{A}$ | --- | 76 | 90 | $\text{m}\Omega$ |
| | | $V_{GS}=-2.5\text{V}$, $I_D=-2\text{A}$ | --- | 100 | 125 | |
| | | $V_{GS}=-1.8\text{V}$, $I_D=-1\text{A}$ | --- | 131 | 170 | |
| $V_{GS(\text{th})}$ | Gate Threshold Voltage | $V_{GS}=V_{DS}$, $I_D = -250\mu\text{A}$ | -0.3 | -0.6 | -1.0 | V |
| $\Delta V_{GS(\text{th})}$ | $V_{GS(\text{th})}$ Temperature Coefficient | | --- | 3 | --- | mV/C |
| g_{fs} | Forward Transconductance | $V_{DS}=-10\text{V}$, $I_S=-1\text{A}$ | --- | 3 | --- | S |

Dynamic and switching Characteristics

| | | | | | | |
|--------------|-------------------------------------|-----------------------------------------------------------------------------------|-----|------|-----|-------------|
| Q_g | Total Gate Charge ^{2, 3} | $V_{DS}=-10\text{V}$, $V_{GS}=-4.5\text{V}$, $I_D=-3\text{A}$ | --- | 4.8 | 8 | nC |
| Q_{gs} | Gate-Source Charge ^{2, 3} | | --- | 0.5 | 1 | |
| Q_{gd} | Gate-Drain Charge ^{2, 3} | | --- | 1.9 | 4 | |
| $T_{d(on)}$ | Turn-On Delay Time ^{2, 3} | $V_{DD}=-10\text{V}$, $V_{GS}=-4.5\text{V}$, $R_G=25\Omega$ $I_D=-1\text{A}$ | --- | 3.5 | 7 | nS |
| T_r | Rise Time ^{2, 3} | | --- | 12.6 | 24 | |
| $T_{d(off)}$ | Turn-Off Delay Time ^{2, 3} | | --- | 32.6 | 62 | |
| T_f | Fall Time ^{2, 3} | | --- | 8.4 | 16 | |
| C_{iss} | Input Capacitance | | --- | 350 | 510 | pF |
| C_{oss} | Output Capacitance | $V_{DS}=-15\text{V}$, $V_{GS}=0\text{V}$, $F=1\text{MHz}$ | --- | 65 | 95 | |
| C_{rss} | Reverse Transfer Capacitance | | --- | 50 | 75 | |

Drain-Source Diode Characteristics and Maximum Ratings

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|----------|---------------------------|------------------------------------------------------------------------|------|------|------|------|
| I_s | Continuous Source Current | $V_G=V_D=0\text{V}$, Force Current | --- | --- | -3 | A |
| I_{SM} | Pulsed Source Current | | --- | --- | -6 | A |
| V_{SD} | Diode Forward Voltage | $V_{GS}=0\text{V}$, $I_S=-1\text{A}$, $T_J=25\text{ }^\circ\text{C}$ | --- | --- | -1 | V |

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. The data tested by pulsed , pulse width $\leq 300\text{us}$, duty cycle $\leq 2\%$.
3. Essentially independent of operating temperature.

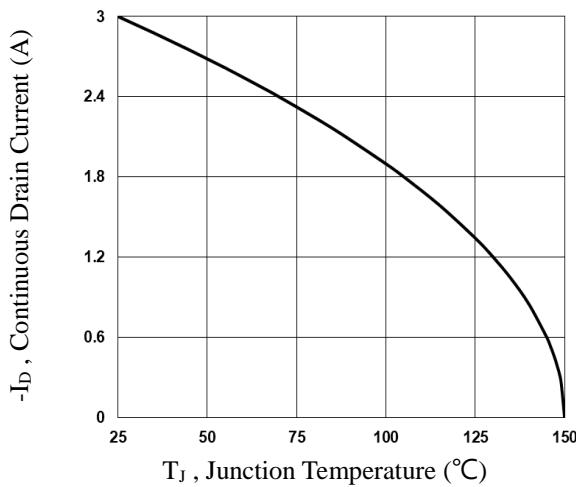
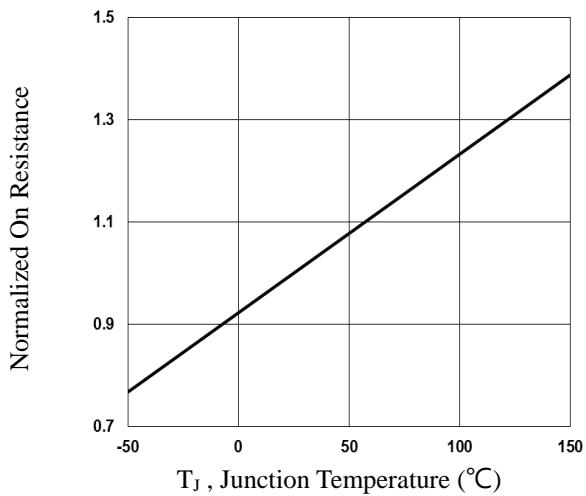
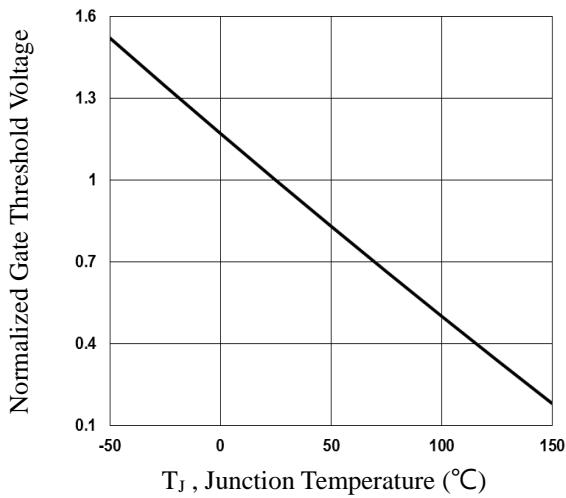
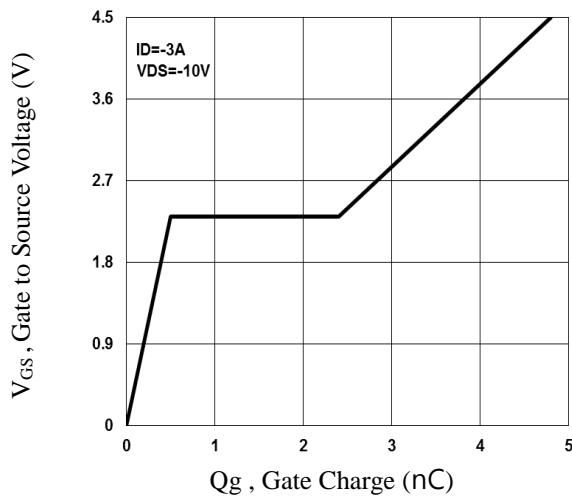
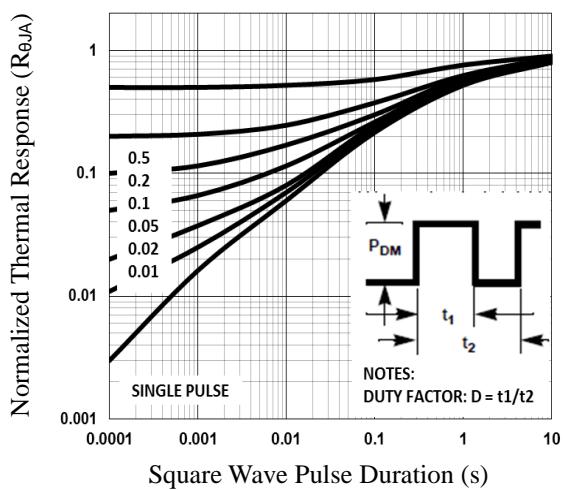
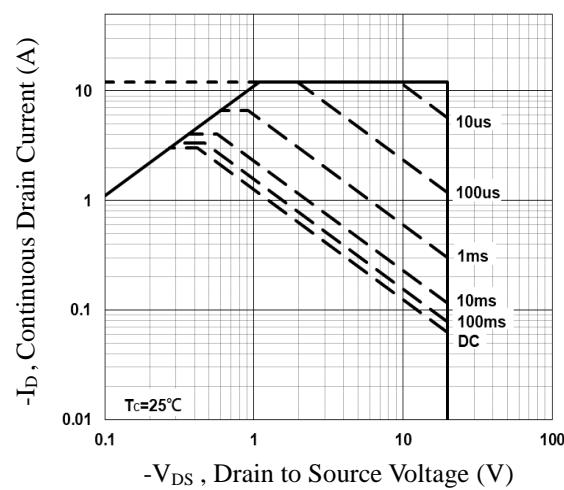
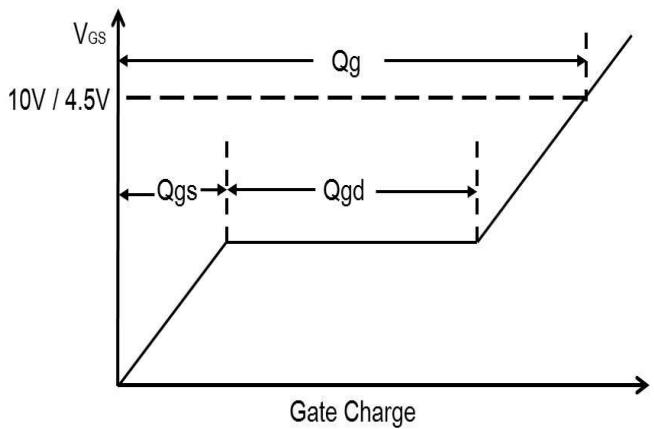
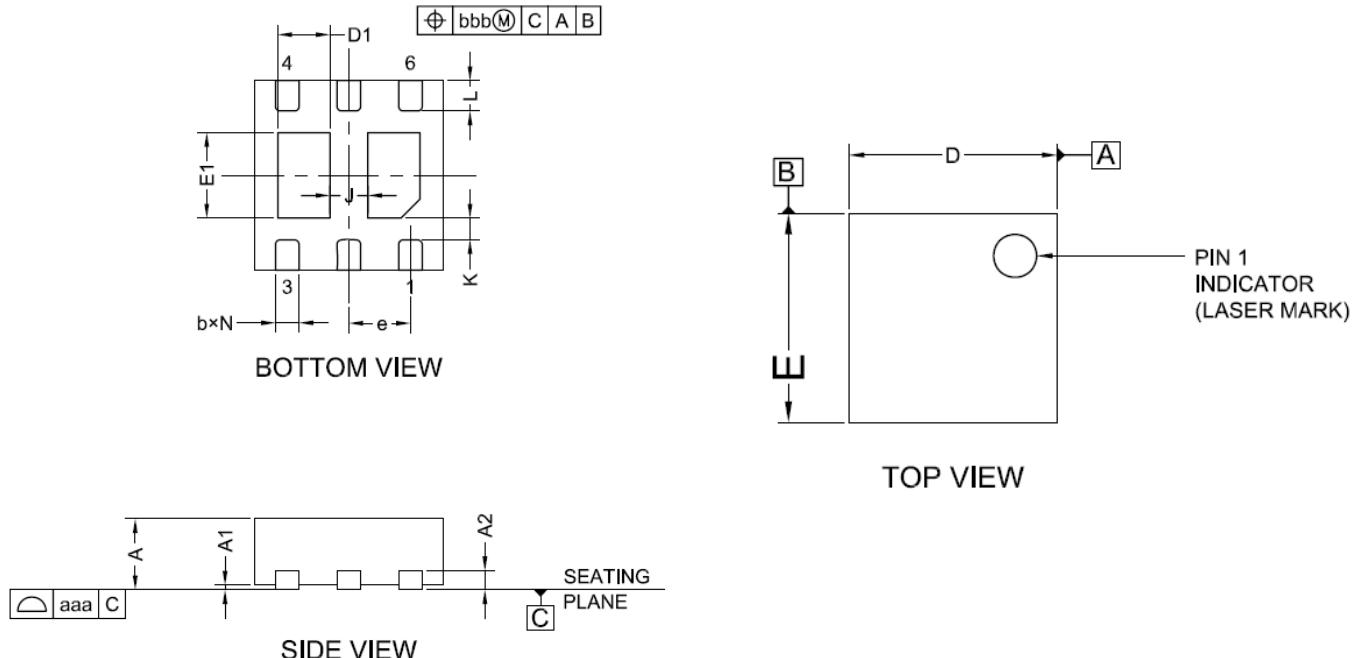

Fig.1 Continuous Drain Current vs. T_J

Fig.2 Normalized $R_{DS(on)}$ vs. T_J

Fig.3 Normalized V_{th} vs. T_J

Fig.4 Gate Charge Waveform

Fig.5 Normalized Transient Impedance

Fig.6 Maximum Safe Operation Area


Fig.7 Switching Time Waveform

Fig.8 Gate Charge Waveform

PPAK2X2 Dual 2EP PACKAGE INFORMATION



COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

| SYMBOL | MIN | TYP | MAX |
|--------|------|---------|------|
| A | 0.70 | 0.75 | 0.80 |
| A1 | 0.00 | 0.02 | 0.05 |
| A2 | | 0.203 | |
| b | 0.20 | 0.25 | 0.30 |
| D | 1.95 | 2.00 | 2.05 |
| D1 | 0.50 | 0.55 | 0.60 |
| E | 1.95 | 2.00 | 2.05 |
| E1 | 0.85 | 0.90 | 0.95 |
| e | | 0.65BSC | |
| L | 0.27 | 0.32 | 0.37 |
| J | | 0.40BSC | |
| K | | 0.20MIN | |
| N | | 6 | |
| aaa | | 0.08 | |
| bbb | | 0.10 | |