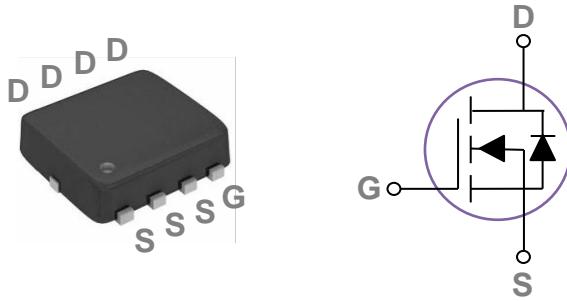


### General Description

These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

### PPAK3X3 Pin Configuration



BVDSS	RDS(ON)	ID
30V	12mΩ	35A

### Features

- 30V,35A,  $RDS(ON) = 12m\Omega @ VGS = 10V$
- Improved dv/dt capability
- Fast switching
- 100% EAS Guaranteed
- Green Device Available

### Applications

- MB / VGA / Vcore
- POL Applications
- SMPS 2<sup>nd</sup> SR

### Absolute Maximum Ratings $T_c=25^\circ C$ unless otherwise noted

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	30	V
$V_{GS}$	Gate-Source Voltage	$\pm 20$	V
$I_D$	Drain Current – Continuous ( $T_c=25^\circ C$ )	35	A
	Drain Current – Continuous ( $T_c=100^\circ C$ )	22	A
$I_{DM}$	Drain Current – Pulsed <sup>1</sup>	140	A
EAS	Single Pulse Avalanche Energy <sup>2</sup>	13	mJ
IAS	Single Pulse Avalanche Current <sup>2</sup>	16	A
$P_D$	Power Dissipation ( $T_c=25^\circ C$ )	27	W
	Power Dissipation – Derate above $25^\circ C$	0.21	W/ $^\circ C$
$T_{STG}$	Storage Temperature Range	-55 to 150	$^\circ C$
$T_J$	Operating Junction Temperature Range	-55 to 150	$^\circ C$

### Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	62	$^\circ C/W$
$R_{\theta JC}$	Thermal Resistance Junction to Case	---	4.6	$^\circ C/W$

**Electrical Characteristics ( $T_J=25^\circ\text{C}$ , unless otherwise noted)**
**Off Characteristics**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$ , $I_{\text{D}}=250\mu\text{A}$	30	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	$\text{BV}_{\text{DSS}}$ Temperature Coefficient	Reference to $25^\circ\text{C}$ , $I_{\text{D}}=1\text{mA}$	---	0.04	---	$\text{V}/^\circ\text{C}$
$I_{\text{DS}}^{\text{SS}}$	Drain-Source Leakage Current	$V_{\text{DS}}=30\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $T_J=25^\circ\text{C}$	---	---	1	$\mu\text{A}$
		$V_{\text{DS}}=24\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $T_J=125^\circ\text{C}$	---	---	10	$\mu\text{A}$
$I_{\text{GSS}}$	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 20\text{V}$ , $V_{\text{DS}}=0\text{V}$	---	---	$\pm 100$	nA

**On Characteristics**

$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance <sup>3</sup>	$V_{\text{GS}}=10\text{V}$ , $I_{\text{D}}=10\text{A}$	---	9.4	12	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}$ , $I_{\text{D}}=5\text{A}$	---	13	18	$\text{m}\Omega$
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$ , $I_{\text{D}}=250\mu\text{A}$	1.2	1.8	2.5	V
			---	-4	---	$\text{mV}/^\circ\text{C}$
$g_{\text{fs}}$	Forward Transconductance	$V_{\text{DS}}=10\text{V}$ , $I_{\text{D}}=3\text{A}$	---	6.4	---	S

**Dynamic and switching Characteristics**

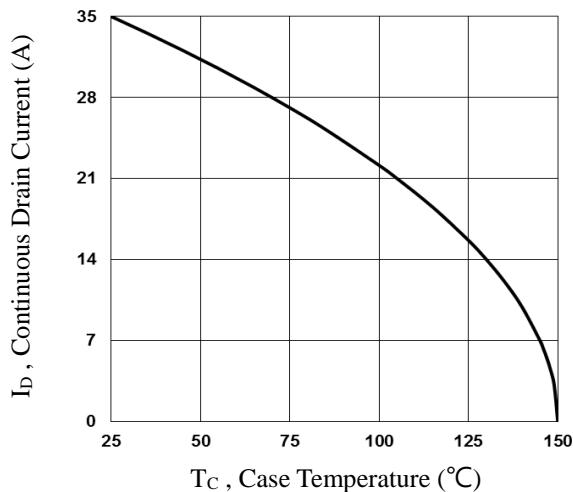
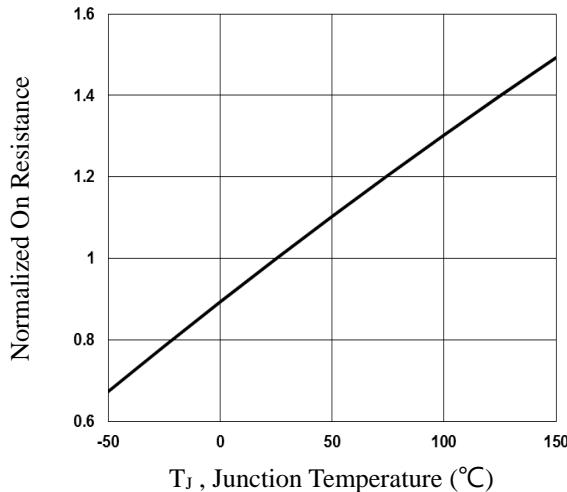
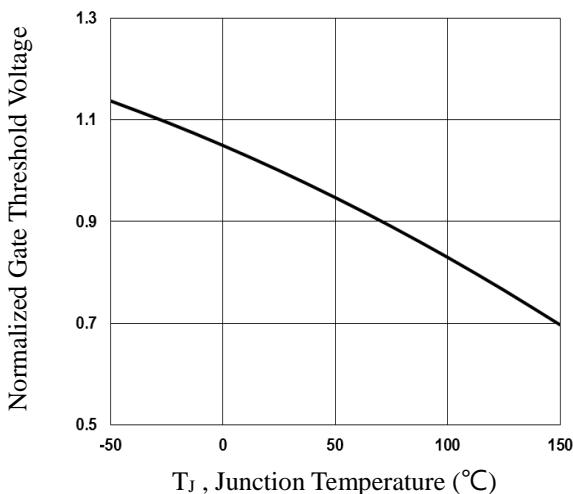
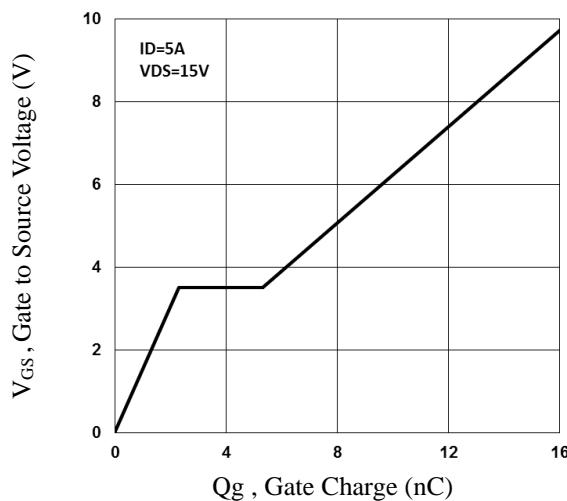
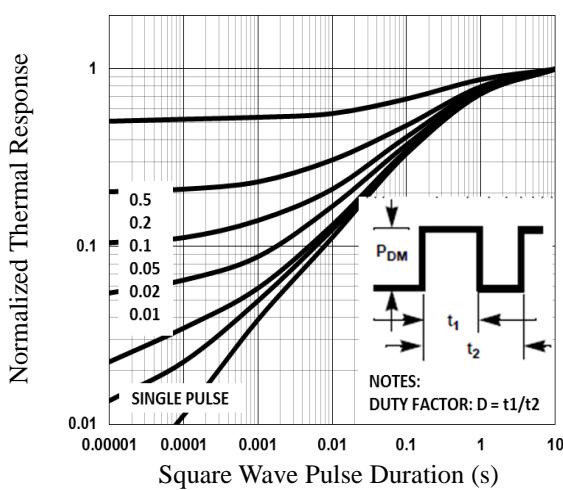
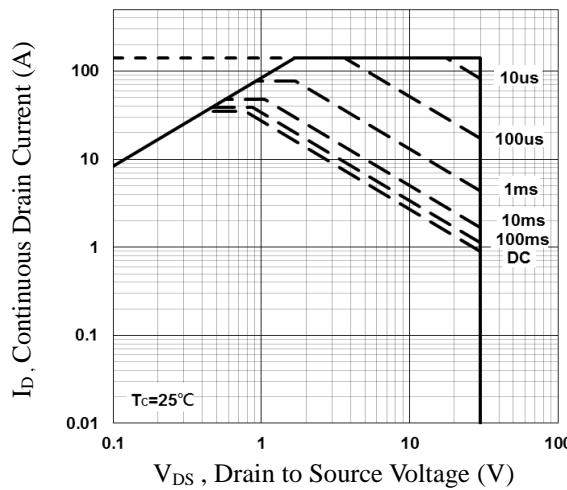
$Q_g$	Total Gate Charge <sup>3, 4</sup>	$V_{\text{DS}}=15\text{V}$ , $V_{\text{GS}}=4.5\text{V}$ , $I_{\text{D}}=5\text{A}$	---	7.4	12	nC
$Q_{\text{gs}}$	Gate-Source Charge <sup>3, 4</sup>		---	2.3	5	
$Q_{\text{gd}}$	Gate-Drain Charge <sup>3, 4</sup>		---	3	6	
$T_{\text{d(on)}}$	Turn-On Delay Time <sup>3, 4</sup>	$V_{\text{DD}}=15\text{V}$ , $V_{\text{GS}}=10\text{V}$ , $R_{\text{G}}=6\Omega$	---	3.8	7	ns
$T_r$	Rise Time <sup>3, 4</sup>		---	10	19	
$T_{\text{d(off)}}$	Turn-Off Delay Time <sup>3, 4</sup>		---	22	42	
$T_f$	Fall Time <sup>3, 4</sup>		---	6.6	13	
$C_{\text{iss}}$	Input Capacitance	$V_{\text{DS}}=25\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $F=1\text{MHz}$	---	620	900	pF
$C_{\text{oss}}$	Output Capacitance		---	85	125	
$C_{\text{rss}}$	Reverse Transfer Capacitance		---	60	90	
$R_g$	Gate resistance	$V_{\text{GS}}=0\text{V}$ , $V_{\text{DS}}=0\text{V}$ , $f=1\text{MHz}$	---	2.8	5.6	$\Omega$

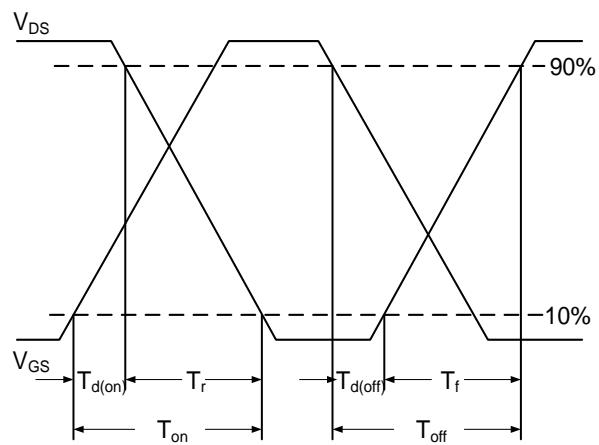
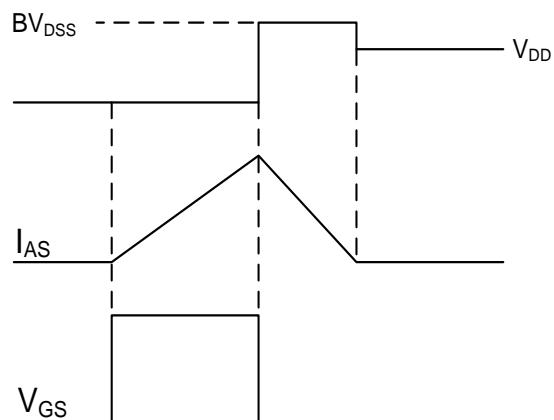
**Drain-Source Diode Characteristics and Maximum Ratings**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$I_s$	Continuous Source Current	$V_G=V_D=0\text{V}$ , Force Current	---	---	35	A
$I_{\text{SM}}$	Pulsed Source Current <sup>3</sup>		---	---	70	A
$V_{\text{SD}}$	Diode Forward Voltage <sup>3</sup>	$V_{\text{GS}}=0\text{V}$ , $I_{\text{S}}=1\text{A}$ , $T_J=25^\circ\text{C}$	---	---	1	V

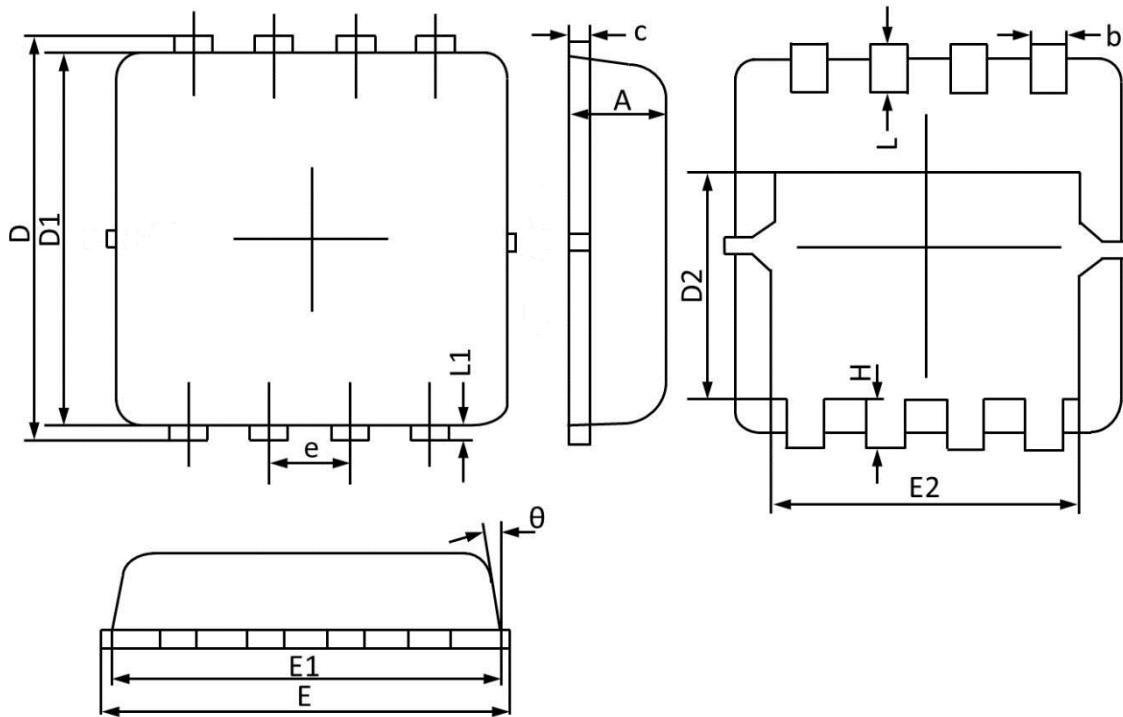
Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2.  $V_{\text{DD}}=25\text{V}$ ,  $V_{\text{GS}}=10\text{V}$ ,  $L=0.1\text{mH}$ ,  $I_{\text{AS}}=16\text{A}$ ,  $R_{\text{G}}=25\Omega$ , Starting  $T_J=25^\circ\text{C}$ .
3. The data tested by pulsed , pulse width  $\leq 300\text{us}$  , duty cycle  $\leq 2\%$ .
4. Essentially independent of operating temperature.


**Fig.1 Continuous Drain Current vs. Tc**

**Fig.2 Normalized RDSON vs. Tj**

**Fig.3 Normalized Vth vs. Tj**

**Fig.4 Gate Charge Waveform**

**Fig.5 Normalized Transient Response**

**Fig.6 Maximum Safe Operation Area**


**Fig.7 Switching Time Waveform**

**Fig.8 EAS Waveform**

## PPAK3x3 PACKAGE INFORMATION



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	0.900	0.700	0.035	0.028
b	0.350	0.250	0.014	0.010
c	0.250	0.100	0.010	0.004
D	3.500	3.050	0.138	0.120
D1	3.200	2.900	0.126	0.114
D2	1.950	1.350	0.077	0.053
E	3.400	3.000	0.134	0.118
E1	3.300	2.900	0.130	0.114
E2	2.600	2.350	0.102	0.093
e	0.65BSC		0.026BSC	
H	0.750	0.300	0.030	0.012
L	0.600	0.300	0.024	0.012
L1	0.200	0.060	0.008	0.002
θ	14°	6°	14°	6°

## PPAK3X3 RECOMMENDED LAND PATTERN

