

### General Description

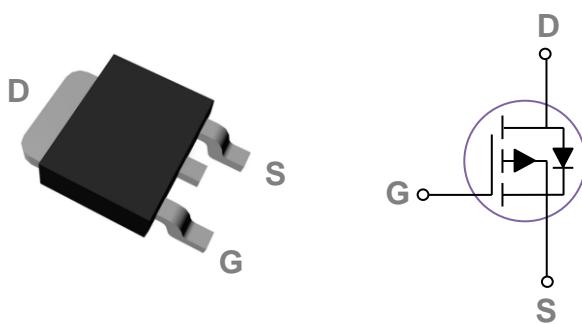
These P-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

BVDSS	RDSON	ID
-60V	28mΩ	-35A

### Features

- -60V,-35A, RDS(ON) =28mΩ@VGS = -10V
- Fast switching
- Green Device Available
- Suit for -4.5V Gate Drive Applications

### TO252 Pin Configuration



### Applications

- POL Applications
- Load Switch
- LED Application

### Absolute Maximum Ratings $T_c=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	-60	V
$V_{GS}$	Gate-Source Voltage	$\pm 20$	V
$I_D$	Drain Current – Continuous ( $T_c=25^\circ\text{C}$ )	-35	A
	Drain Current – Continuous ( $T_c=100^\circ\text{C}$ )	-22.1	A
$I_{DM}$	Drain Current – Pulsed <sup>1</sup>	-140	A
EAS	Single Pulse Avalanche Energy <sup>2</sup>	105	mJ
IAS	Single Pulse Avalanche Current <sup>2</sup>	-46	A
$P_D$	Power Dissipation ( $T_c=25^\circ\text{C}$ )	72.6	W
	Power Dissipation – Derate above 25°C	0.58	W/°C
$T_{STG}$	Storage Temperature Range	-55 to 150	°C
$T_J$	Operating Junction Temperature Range	-55 to 150	°C

### Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JC}$	Thermal Resistance Junction to Case	---	1.72	°C/W
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	---	62	°C/W

**Electrical Characteristics ( $T_J=25\text{ }^{\circ}\text{C}$ , unless otherwise noted)**
**Off Characteristics**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0\text{V}$ , $I_D=-250\mu\text{A}$	-60	---	---	V
$I_{DSS}$	Drain-Source Leakage Current	$V_{DS}=-60\text{V}$ , $V_{GS}=0\text{V}$ , $T_J=25\text{ }^{\circ}\text{C}$	---	---	-1	$\mu\text{A}$
		$V_{DS}=-48\text{V}$ , $V_{GS}=0\text{V}$ , $T_J=125\text{ }^{\circ}\text{C}$	---	---	-10	$\mu\text{A}$
$I_{GSS}$	Gate-Source Leakage Current	$V_{GS}=\pm 20\text{V}$ , $V_{DS}=0\text{V}$	---	---	$\pm 100$	nA

**On Characteristics**

$R_{DS(\text{ON})}$	Static Drain-Source On-Resistance	$V_{GS}=-10\text{V}$ , $I_D=-8\text{A}$	---	22	28	$\text{m}\Omega$
		$V_{GS}=-4.5\text{V}$ , $I_D=-6\text{A}$	---	26	35	$\text{m}\Omega$
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$ , $I_D = -250\mu\text{A}$	-1.0	-1.6	-2.5	V
$g_{fs}$	Forward Transconductance	$V_{DS}=-10\text{V}$ , $I_D=-3\text{A}$	---	18	---	S

**Dynamic and switching Characteristics**

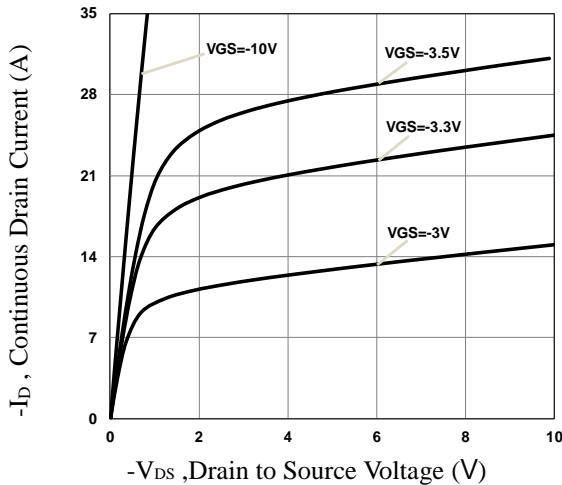
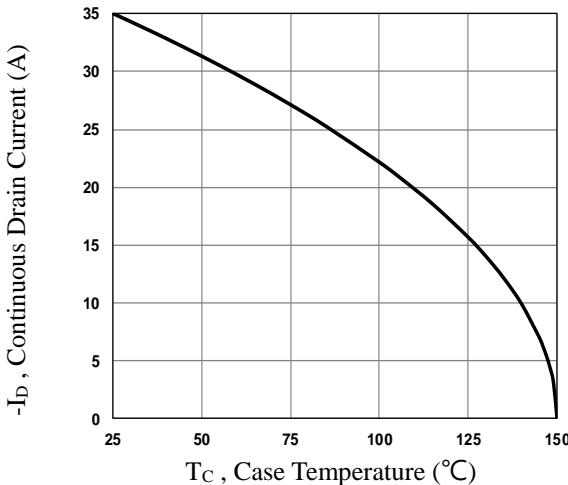
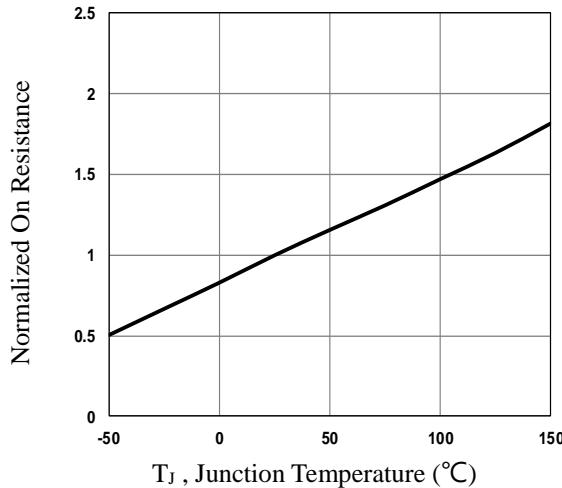
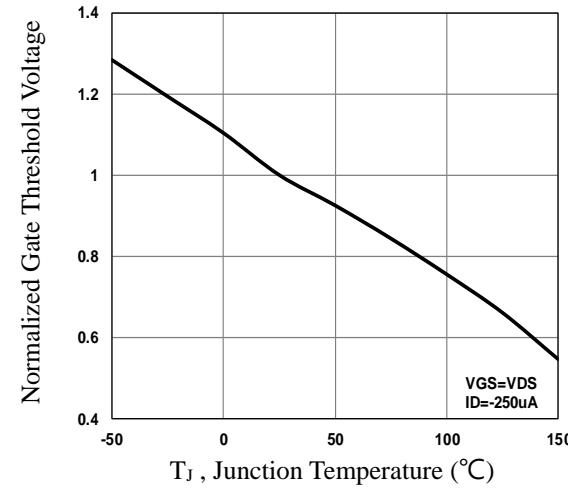
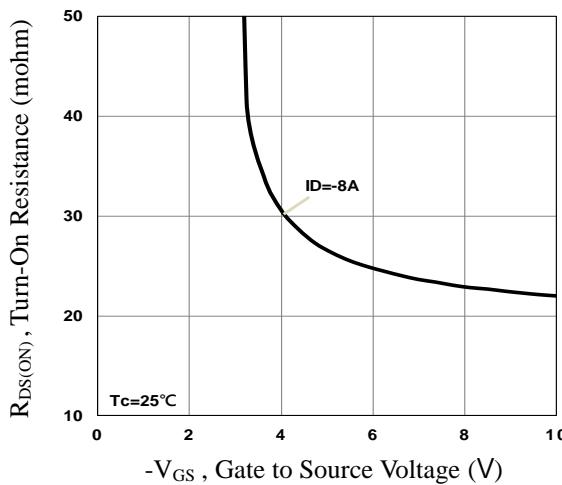
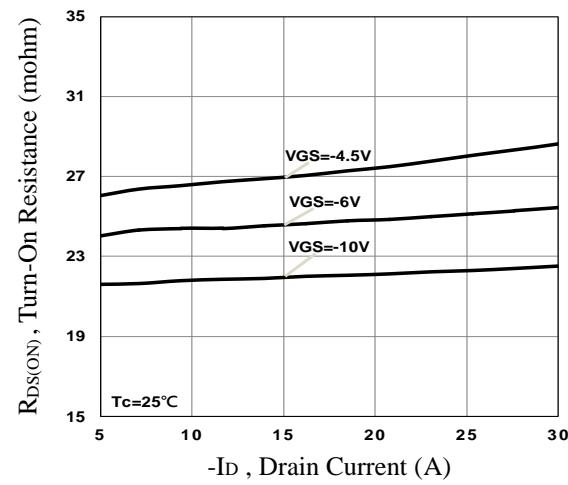
$Q_g$	Total Gate Charge <sup>3, 4</sup>	$V_{DS}=-30\text{V}$ , $V_{GS}=-10\text{V}$ , $I_D=-5\text{A}$	---	43.8	88	nC
$Q_{gs}$	Gate-Source Charge <sup>3, 4</sup>	$V_{DS}=-30\text{V}$ , $V_{GS}=-4.5\text{V}$ , $I_D=-5\text{A}$	---	20	40	
$Q_{gd}$	Gate-Drain Charge <sup>3, 4</sup>		---	4.6	9	
$Q_{gd}$	Gate-Drain Charge <sup>3, 4</sup>		---	8.3	17	
$T_{d(on)}$	Turn-On Delay Time <sup>3, 4</sup>	$V_{DD}=-30\text{V}$ , $V_{GS}=-10\text{V}$ , $R_G=6\Omega$	---	25	50	ns
$T_r$	Rise Time <sup>3, 4</sup>		---	13.8	28	
$T_{d(off)}$	Turn-Off Delay Time <sup>3, 4</sup>		---	148	290	
$T_f$	Fall Time <sup>3, 4</sup>		---	51	100	
$C_{iss}$	Input Capacitance	$V_{DS}=-25\text{V}$ , $V_{GS}=0\text{V}$ , $F=1\text{MHz}$	---	2595	3900	pF
$C_{oss}$	Output Capacitance		---	162	240	
$C_{rss}$	Reverse Transfer Capacitance		---	115	170	

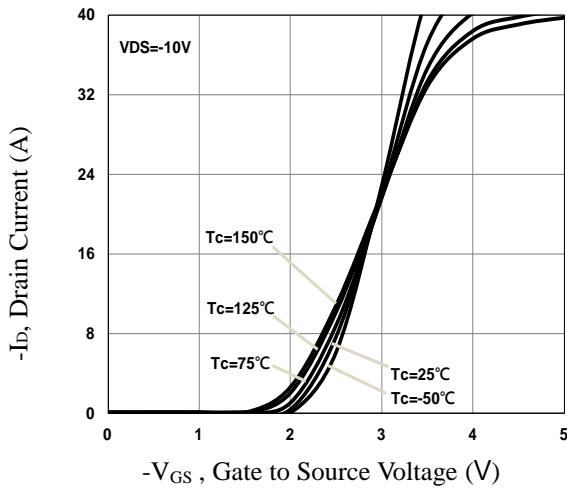
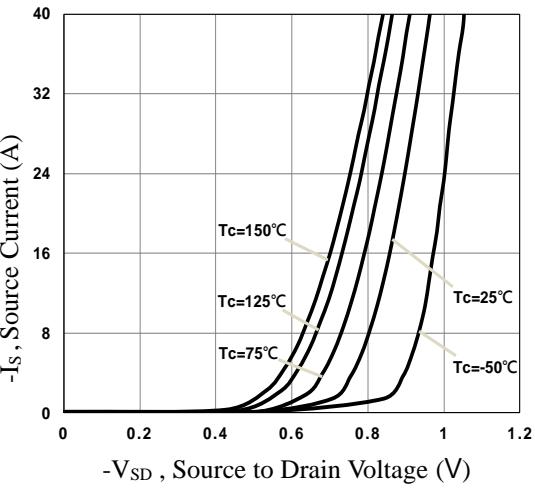
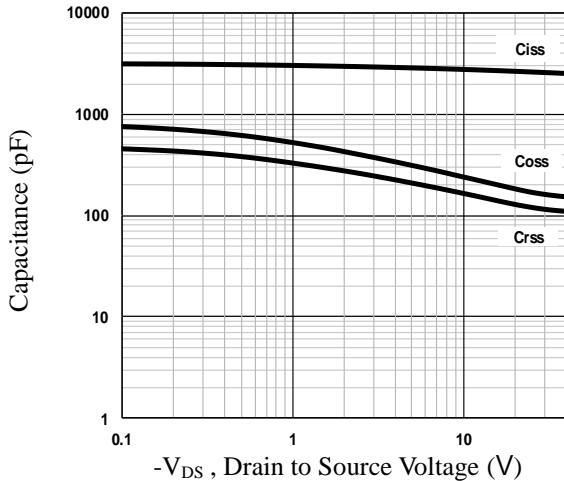
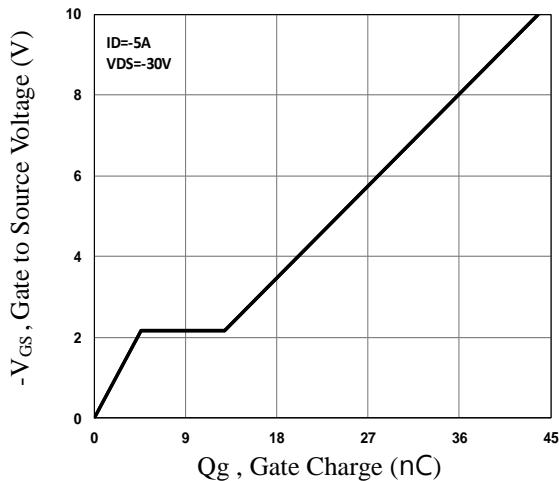
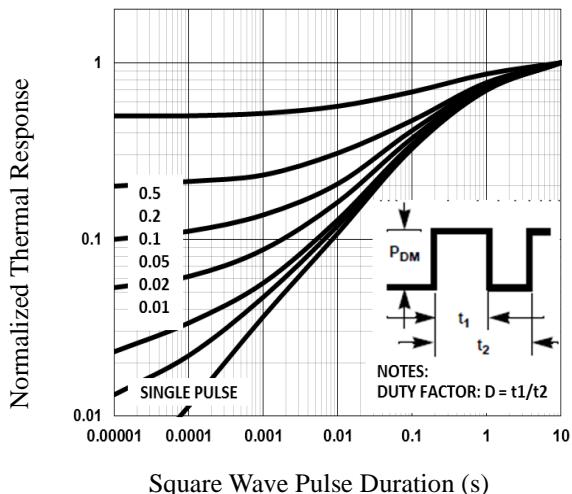
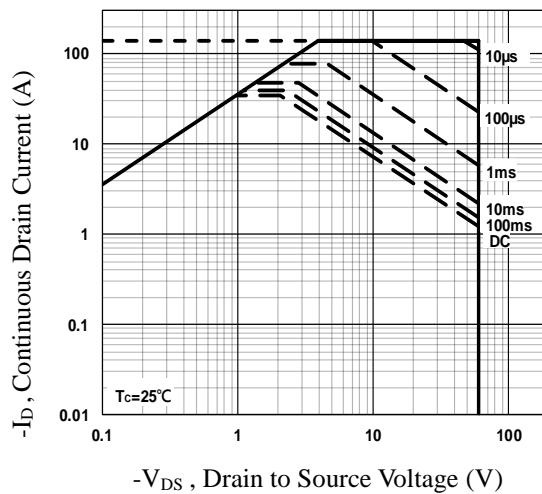
**Drain-Source Diode Characteristics and Maximum Ratings**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$I_s$	Continuous Source Current	$V_G=V_D=0\text{V}$ , Force Current	---	---	-35	A
$I_{SM}$	Pulsed Source Current		---	---	-70	A
$V_{SD}$	Diode Forward Voltage	$V_{GS}=0\text{V}$ , $I_s=-1\text{A}$ , $T_J=25\text{ }^{\circ}\text{C}$	---	---	-1	V

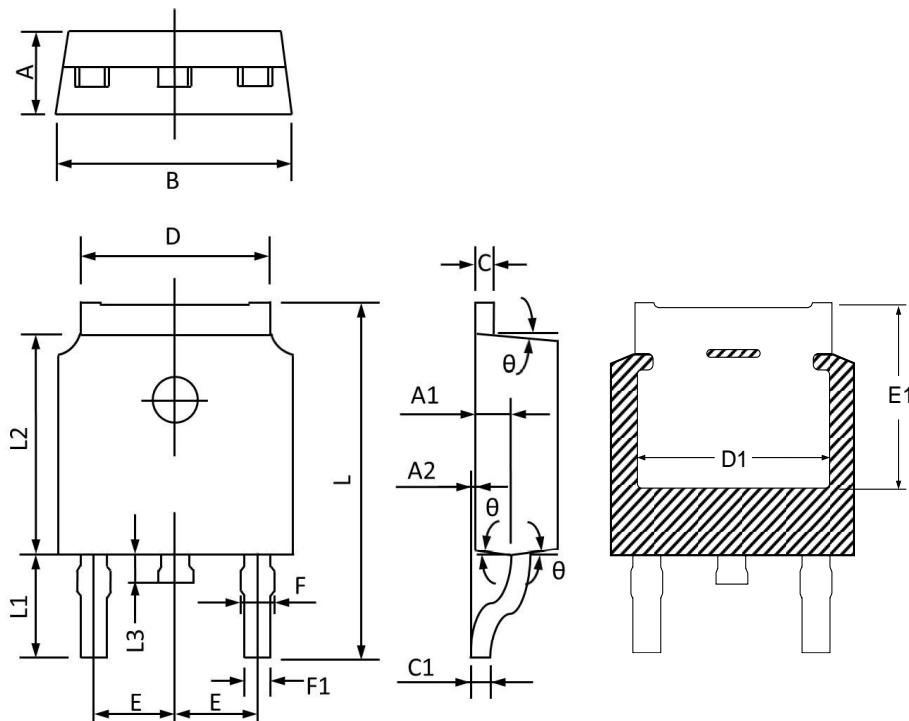
Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2.  $V_{DD}=-25\text{V}$ ,  $V_{GS}=-10\text{V}$ ,  $L=0.1\text{mH}$ ,  $I_{AS}=-46\text{A}$ , Starting  $T_J=25\text{ }^{\circ}\text{C}$
3. The data tested by pulsed , pulse width  $\leq 300\mu\text{s}$  , duty cycle  $\leq 2\%$ .
4. Essentially independent of operating temperature.


**Fig.1 Typical Output Characteristics**

**Fig.2 Continuous Drain Current vs.  $T_c$** 

**Fig.3 Normalized RDSON vs.  $T_j$** 

**Fig.4 Normalized  $V_{th}$  vs.  $T_j$** 

**Fig.5 Turn-On Resistance vs.  $V_{GS}$** 

**Fig.6 Turn-On Resistance vs.  $I_D$**

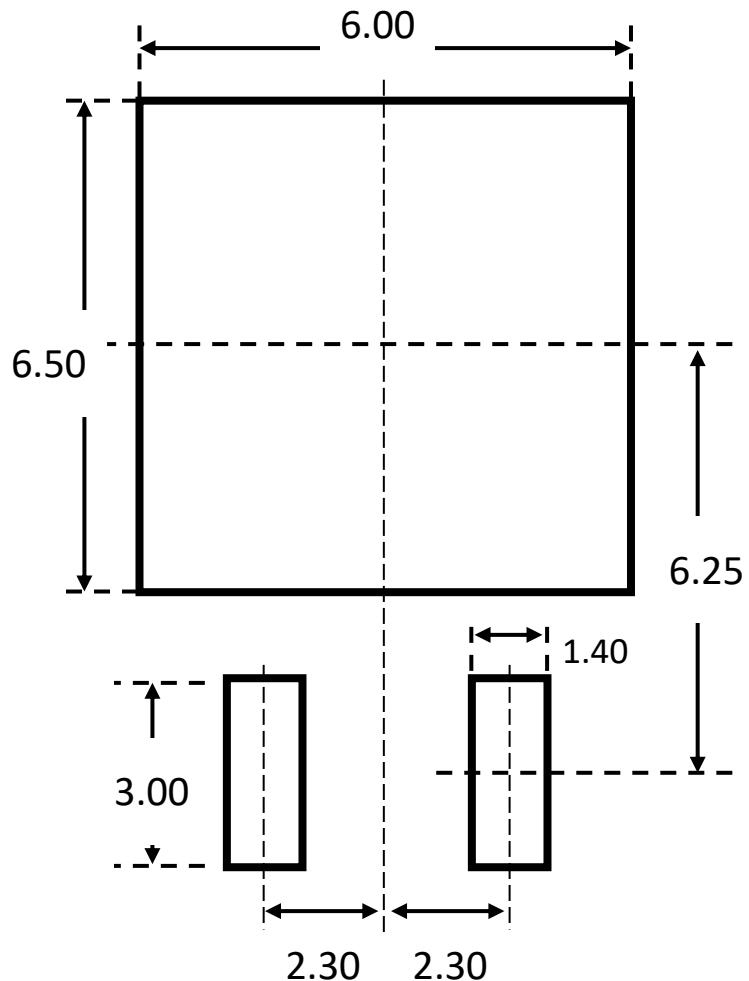

**Fig.7 Transfer Characteristics**

**Fig.8 Source Current vs.  $V_{SD}$** 

**Fig.9 Capacitance Characteristics**

**Fig.10 Gate Charge Characteristics**

**Fig.11 Normalized Transient Impedance**

**Fig.12 Maximum Safe Operation Area**

## TO252 PACKAGE INFORMATION



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	2.450	2.150	0.096	0.085
A1	1.200	0.900	0.047	0.035
A2	0.250	0.000	0.010	0.000
B	6.800	6.300	0.268	0.248
C	0.600	0.350	0.024	0.014
C1	0.600	0.380	0.024	0.015
D	5.500	5.100	0.217	0.201
D1	5.400	4.950	0.212	0.195
E	2.400	2.000	0.094	0.079
E1	5.650	4.950	0.222	0.194
F	1.150	0.600	0.045	0.024
F1	0.900	0.500	0.035	0.020
L	10.400	9.400	0.409	0.370
L1	3.100	2.400	0.122	0.094
L2	6.300	5.300	0.248	0.209
L3	1.200	0.600	0.047	0.024
θ	9°	3°	9°	3°

## TO252 RECOMMENDED LAND PATTERN



unit : mm