


General Description

These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

SOT23-3S Pin Configuration



BVDSS	RDS(on)	ID
60V	3.5Ω	0.5A

Features

- 60V, 0.5A, $R_{DS(ON)} = 3.5\Omega @ V_{GS} = 10V$
- Improved dv/dt capability
- Fast switching
- Green Device Available
- G-S ESD Protection Diode Embedded

Applications

- Motor Drive
- Power Tools
- LED Lighting

Absolute Maximum Ratings $T_c = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	60	V
V_{GS}	Gate-Source Voltage	± 12	V
I_D	Drain Current – Continuous ($T_A = 25^\circ\text{C}$)	0.5	A
	Drain Current – Continuous ($T_A = 70^\circ\text{C}$)	0.4	A
I_{DM}	Drain Current – Pulsed ¹	2	A
P_D	Power Dissipation ($T_A = 25^\circ\text{C}$)	1.56	W
	Power Dissipation – Derate above 25°C	12.5	mW/ $^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	80	$^\circ\text{C/W}$

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)
Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=250\mu A$	60	---	---	V
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=60V$, $V_{GS}=0V$, $T_J=25^\circ\text{C}$	---	---	1	μA
		$V_{DS}=48V$, $V_{GS}=0V$, $T_J=125^\circ\text{C}$	---	---	1	mA
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 12V$, $V_{DS}=0V$	---	---	± 20	μA

On Characteristics

$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=4.5V$, $I_D=0.2A$	---	2.3	3.5	Ω
		$V_{GS}=2.5V$, $I_D=0.1A$	---	2.4	4.8	Ω
		$V_{GS}=1.8V$, $I_D=0.1A$	---	2.5	6	Ω
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=250\mu A$	0.6	0.8	1.2	V

Dynamic and switching Characteristics²

Q_g	Total Gate Charge	$V_{DS}=30V$, $V_{GS}=4.5V$, $I_D=0.2A$	---	1	2	nC
Q_{gs}	Gate-Source Charge		---	0.1	0.3	
Q_{gd}	Gate-Drain Charge		---	0.5	1	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=30V$, $V_{GS}=4.5V$, $R_G=6\Omega$ $I_D=0.2A$	---	5	10	ns
T_r	Rise Time		---	20	40	
$T_{d(off)}$	Turn-Off Delay Time		---	15	30	
T_f	Fall Time		---	80	160	
C_{iss}	Input Capacitance	$V_{DS}=30V$, $V_{GS}=0V$, $F=1\text{MHz}$	---	39	80	pF
C_{oss}	Output Capacitance		---	16	35	
C_{rss}	Reverse Transfer Capacitance		---	7.7	15	

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current	$V_G=V_D=0V$, Force Current	---	---	0.5	A
I_{SM}	Pulsed Source Current		---	---	1	A
V_{SD}	Diode Forward Voltage	$V_{GS}=0V$, $I_S=0.2A$, $T_J=25^\circ\text{C}$	---	---	1	V

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. Essentially independent of operating temperature.

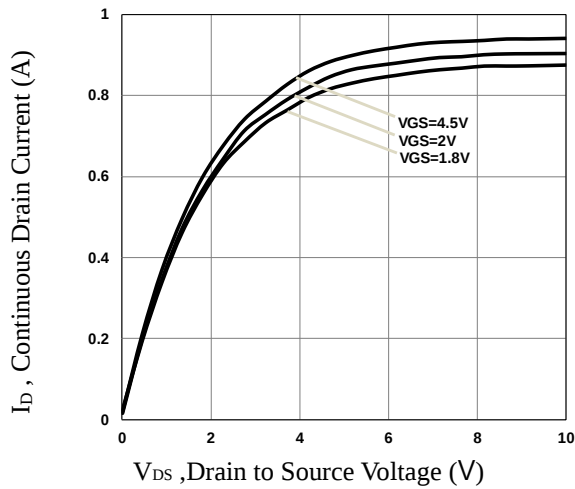


Fig.1 Typical Output Characteristics

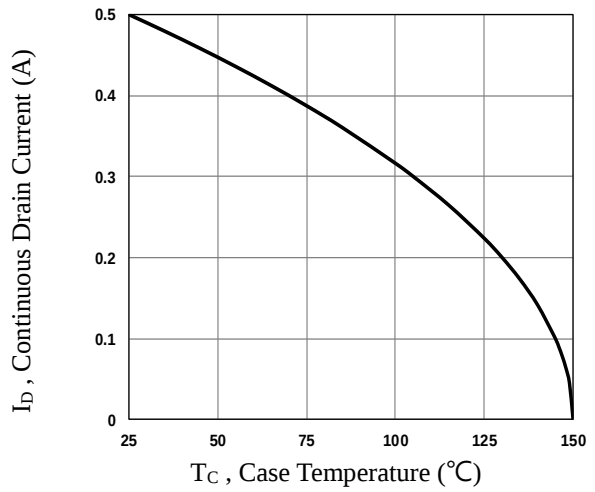


Fig.2 Continuous Drain Current vs. T_C

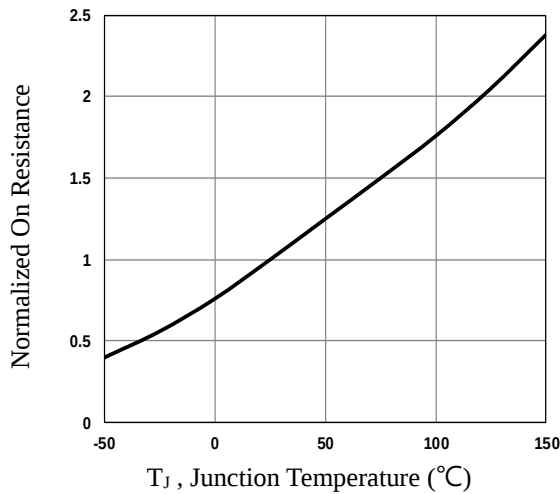


Fig.3 Normalized $R_{DS(on)}$ vs. T_J

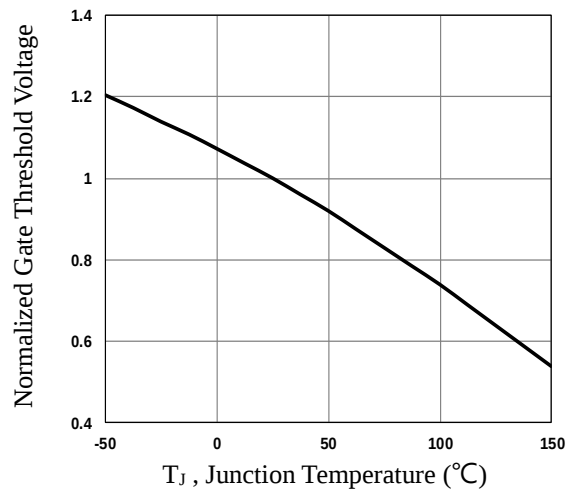


Fig.4 Normalized V_{th} vs. T_J

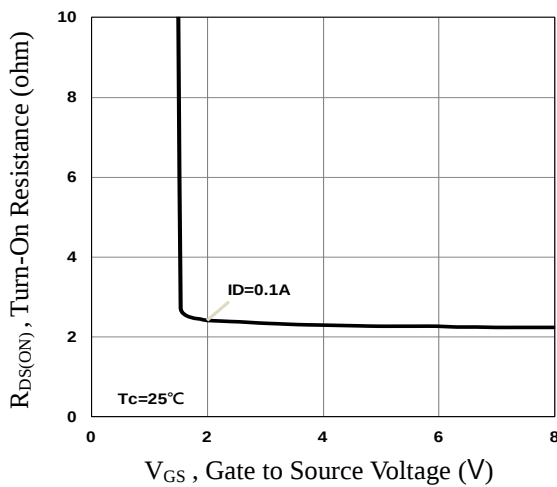


Fig.5 Turn-On Resistance vs. V_{GS}

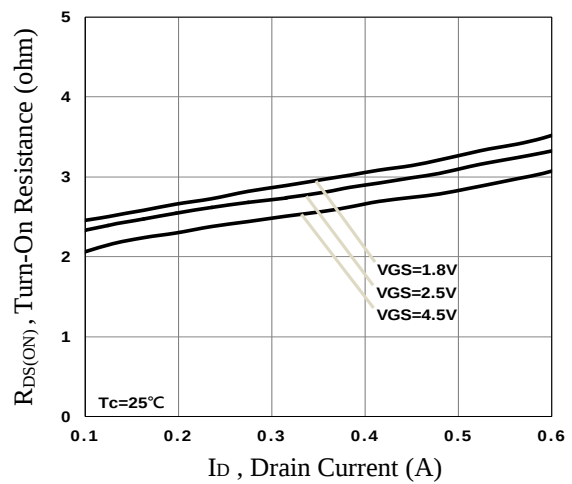


Fig.6 Turn-On Resistance vs. I_D

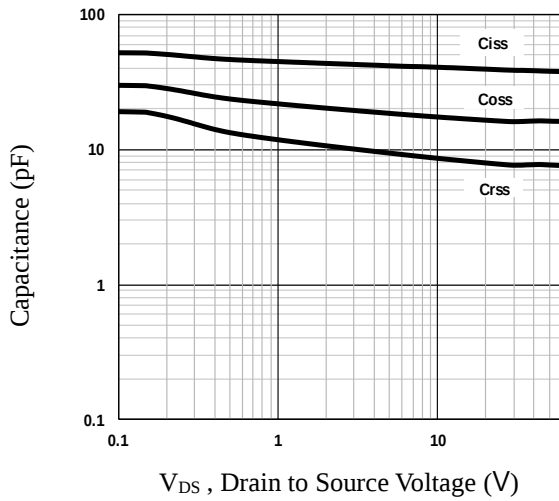


Fig.7 Capacitance Characteristics

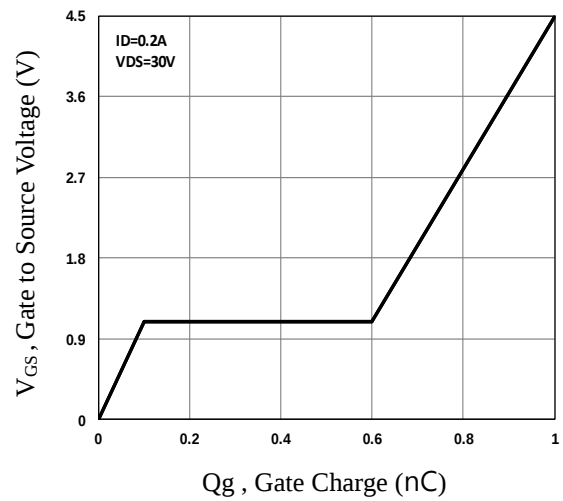


Fig.8 Gate Charge Characteristics

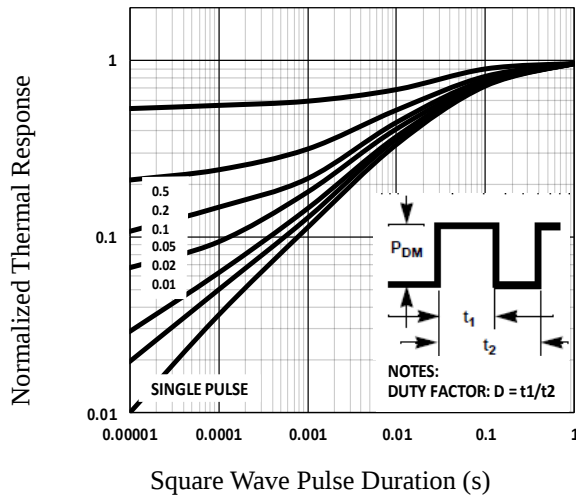


Fig.9 Normalized Transient Impedance

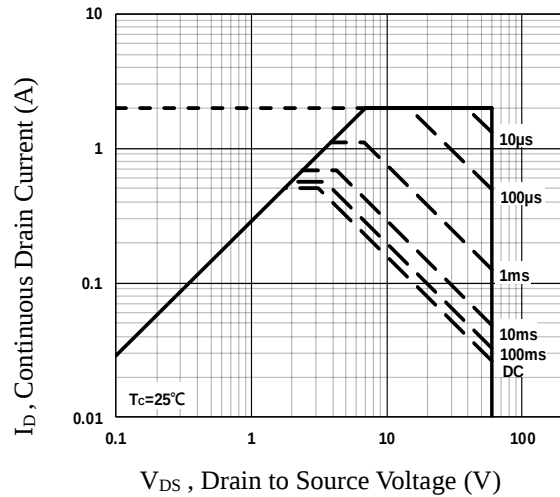


Fig.10 Maximum Safe Operation Area

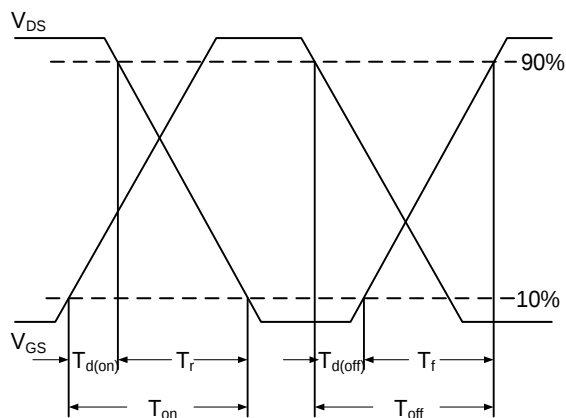


Fig.11 Switching Time Waveform


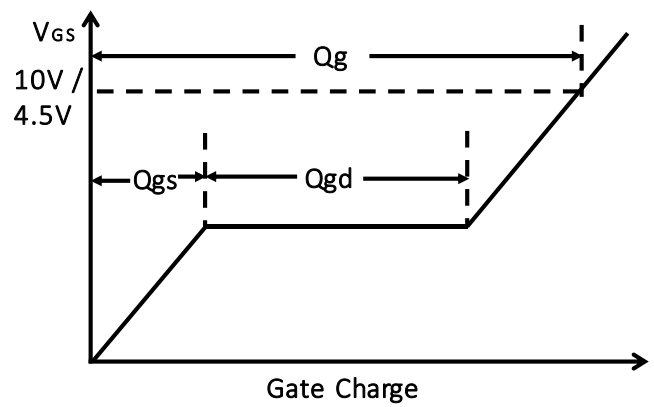



Fig.12 Gate Charge Waveform

SOT23-3S PACKAGE INFORMATION

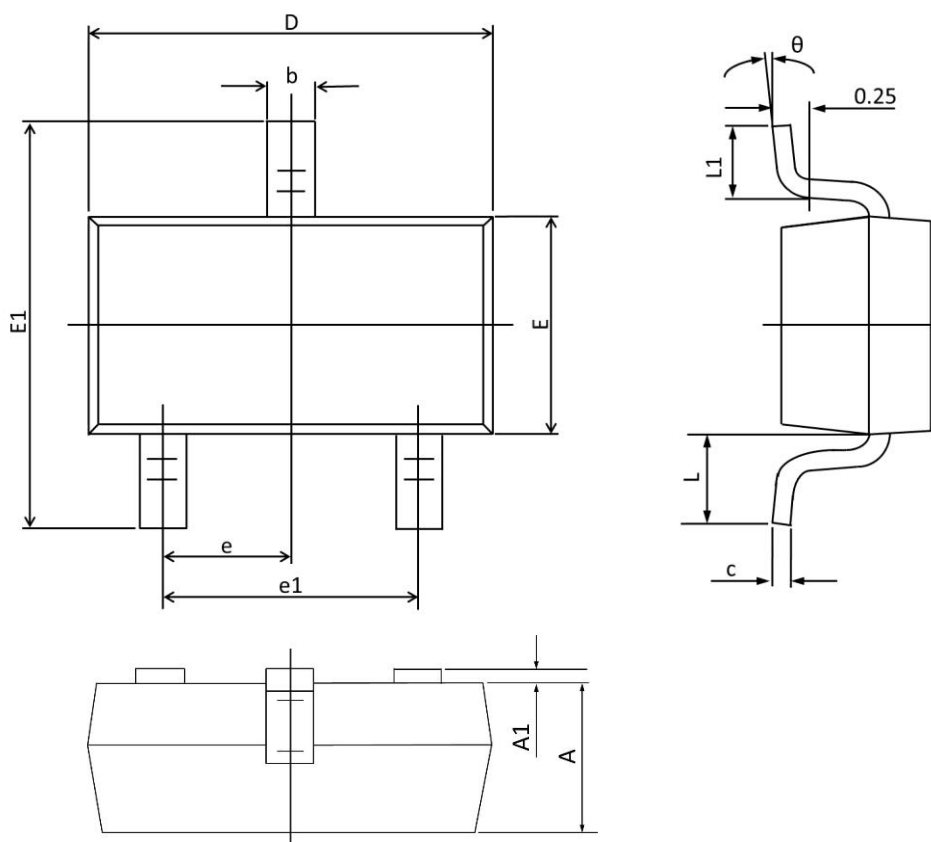

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.001	0.100	0.000	0.004
b	0.300	0.500	0.012	0.020
c	0.080	0.180	0.003	0.008
D	2.700	3.100	0.106	0.122
E	1.100	1.500	0.043	0.059
E1	2.100	2.640	0.080	0.104
e	0.950 TYP.		0.037 TYP.	
e1	1.780	2.040	0.070	0.080
L	0.550 REF.		0.022 REF.	
L1	0.100	0.500	0.004	0.020
θ	1°	10°	1°	10°

SOT23-3S RECOMMENDED LAND PATTERN

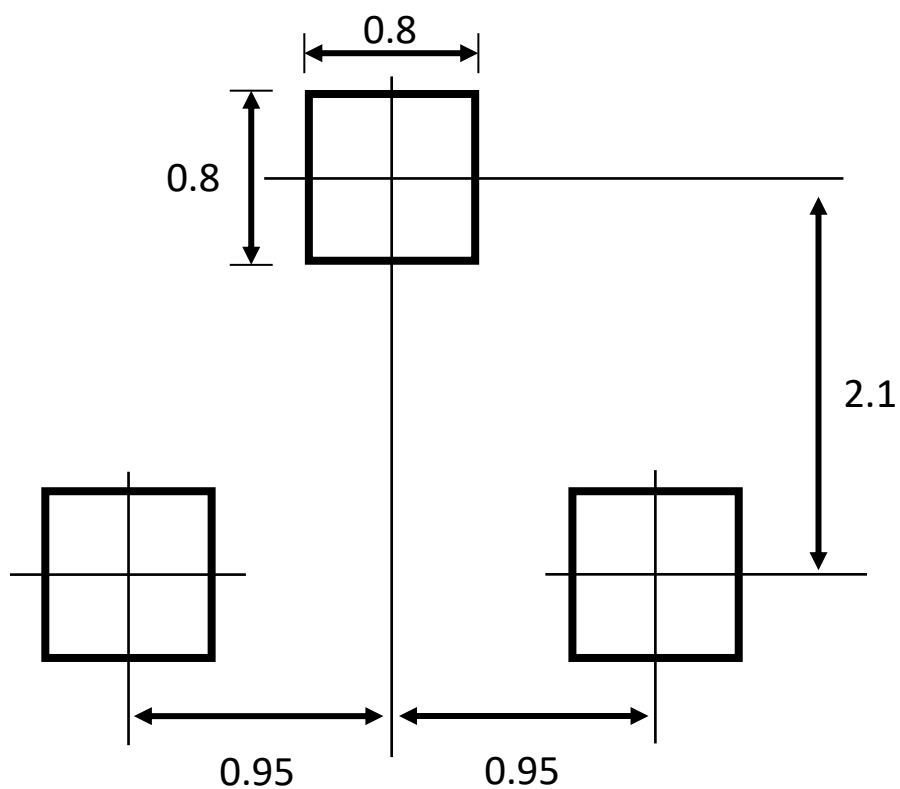

unit : mm