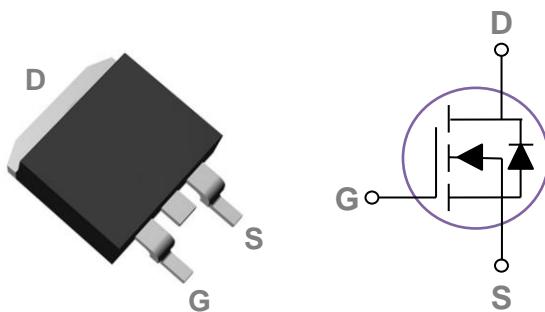


### General Description

These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

### TO263 Pin Configuration



BVDSS	RDS(ON)	ID
100V	1.7mΩ	280A

### Features

- 100V,280A, RDS(ON) =1.7mΩ@VGS = 10V
- Improved dv/dt capability
- Fast switching
- 100% EAS Guaranteed
- Green Device Available

### Applications

- Motor Drive
- Power Tools
- LED Lighting
- Quick Charger

### Absolute Maximum Ratings $T_c=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	100	V
$V_{GS}$	Gate-Source Voltage	$\pm 20$	V
$I_D$	Drain Current – Continuous ( $T_c=25^\circ\text{C}$ )	280	A
	Drain Current – Continuous ( $T_c=100^\circ\text{C}$ )	179	A
$I_{DM}$	Drain Current – Pulsed <sup>1</sup>	1120	A
EAS	Single Pulse Avalanche Energy <sup>2</sup>	3120	mJ
IAS	Single Pulse Avalanche Current <sup>2</sup>	79	A
$P_D$	Power Dissipation ( $T_c=25^\circ\text{C}$ )	480	W
	Power Dissipation – Derate above 25°C	3.85	W/°C
$T_{STG}$	Storage Temperature Range	-55 to 150	°C
$T_J$	Operating Junction Temperature Range	-55 to 150	°C

### Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	62	°C/W
$R_{\theta JC}$	Thermal Resistance Junction to Case	---	0.26	°C/W

**Electrical Characteristics ( $T_J=25\text{ }^{\circ}\text{C}$ , unless otherwise noted)**
**Off Characteristics**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0\text{V}$ , $I_D=250\mu\text{A}$	100	---	---	V
$I_{DSS}$	Drain-Source Leakage Current	$V_{DS}=80\text{V}$ , $V_{GS}=0\text{V}$ , $T_J=25\text{ }^{\circ}\text{C}$	---	---	1	uA
		$V_{DS}=80\text{V}$ , $V_{GS}=0\text{V}$ , $T_J=85\text{ }^{\circ}\text{C}$	---	---	30	uA
$I_{GSS}$	Gate-Source Leakage Current	$V_{GS}=\pm 20\text{V}$ , $V_{DS}=0\text{V}$	---	---	$\pm 100$	nA

**On Characteristics**

$R_{DS(\text{ON})}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}$ , $I_D=30\text{A}$	---	1.4	1.7	mΩ
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$ , $I_D = 250\mu\text{A}$	2	2.8	4	V
$g_{fs}$	Forward Transconductance	$V_{DS}=10\text{V}$ , $I_D=3\text{A}$	---	21	---	S

**Dynamic and switching Characteristics**

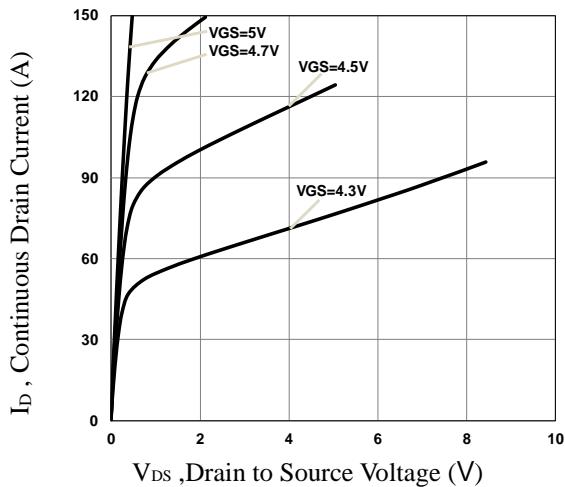
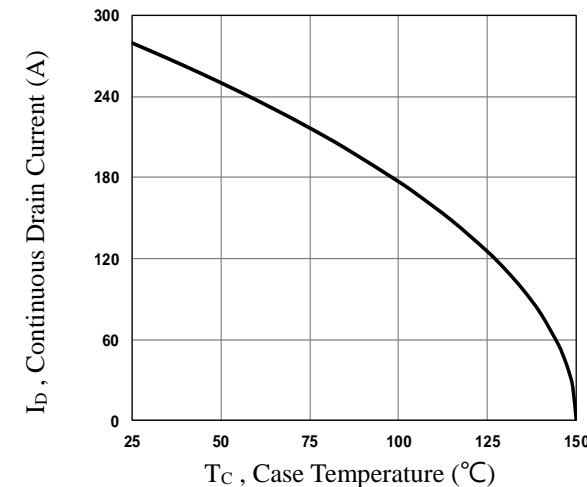
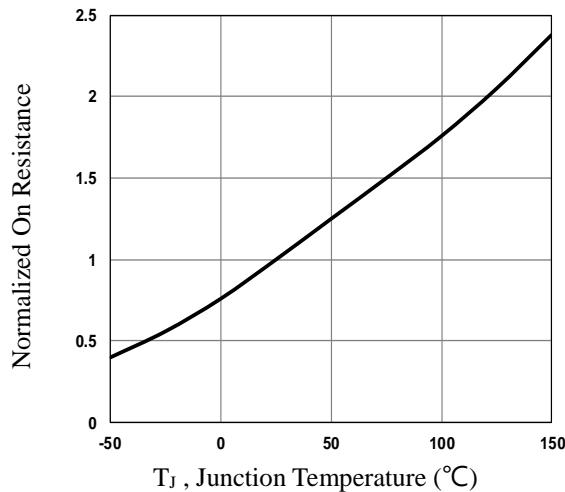
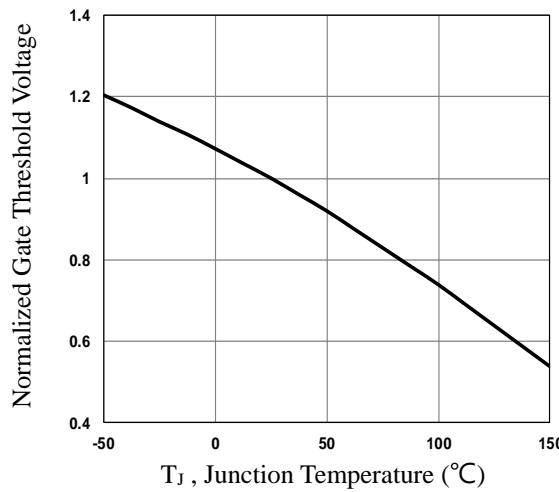
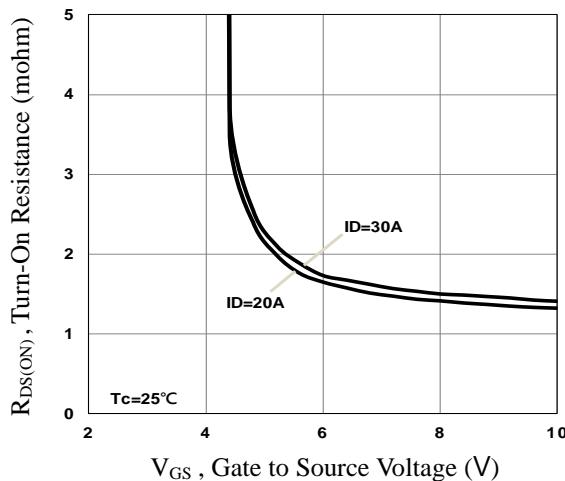
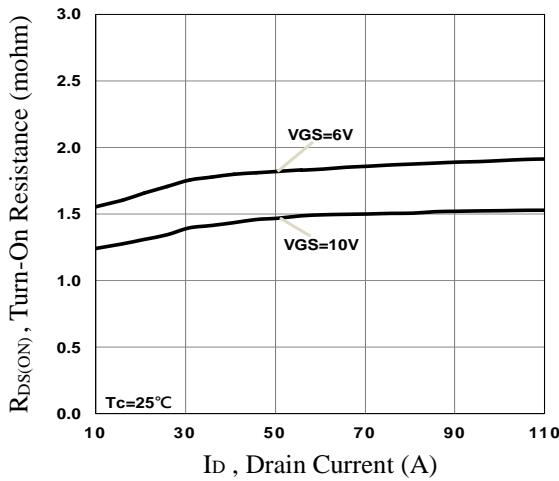
$Q_g$	Total Gate Charge <sup>3, 4</sup>	$V_{DS}=50\text{V}$ , $V_{GS}=10\text{V}$ , $I_D=100\text{A}$	---	176	265	nC
$Q_{gs}$	Gate-Source Charge <sup>3, 4</sup>		---	44	70	
$Q_{gd}$	Gate-Drain Charge <sup>3, 4</sup>		---	48	75	
$T_{d(on)}$	Turn-On Delay Time <sup>3, 4</sup>	$V_{DD}=50\text{V}$ , $V_{GS}=10\text{V}$ , $R_G=6\Omega$ $I_D=100\text{A}$	---	35	55	ns
$T_r$	Rise Time <sup>3, 4</sup>		---	50	75	
$T_{d(off)}$	Turn-Off Delay Time <sup>3, 4</sup>		---	35	55	
$T_f$	Fall Time <sup>3, 4</sup>		---	70	105	
$C_{iss}$	Input Capacitance	$V_{DS}=50\text{V}$ , $V_{GS}=0\text{V}$ , $F=1\text{MHz}$	---	10800	16200	pF
$C_{oss}$	Output Capacitance		---	2050	3100	
$C_{rss}$	Reverse Transfer Capacitance		---	35	55	
$R_g$	Gate resistance	$V_{GS}=0\text{V}$ , $V_{DS}=0\text{V}$ , $F=1\text{MHz}$	---	1.9	---	Ω

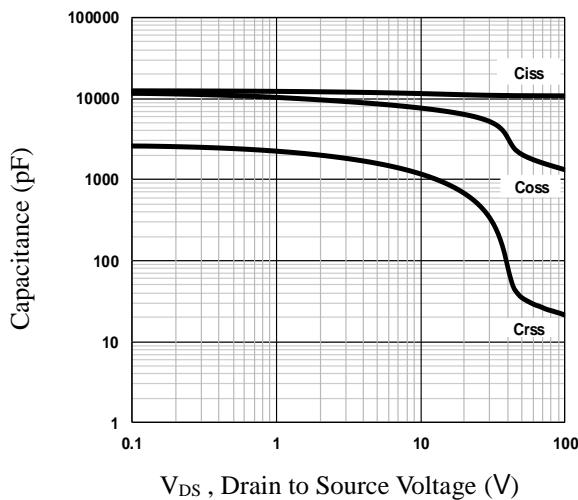
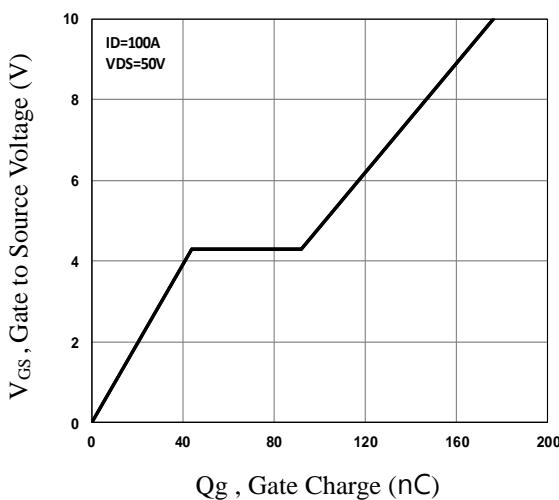
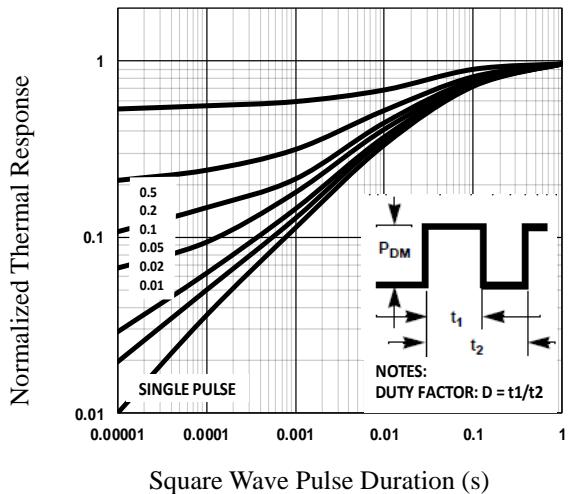
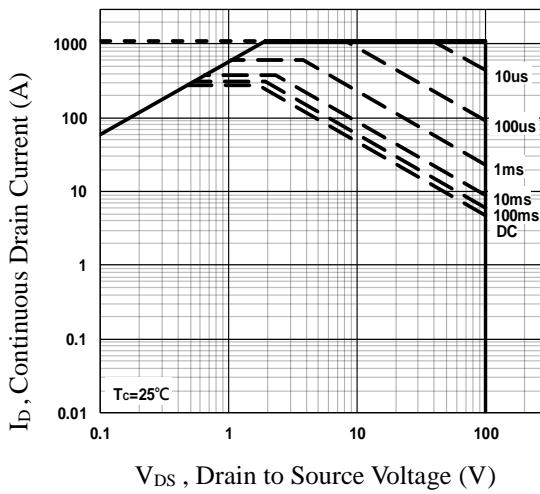
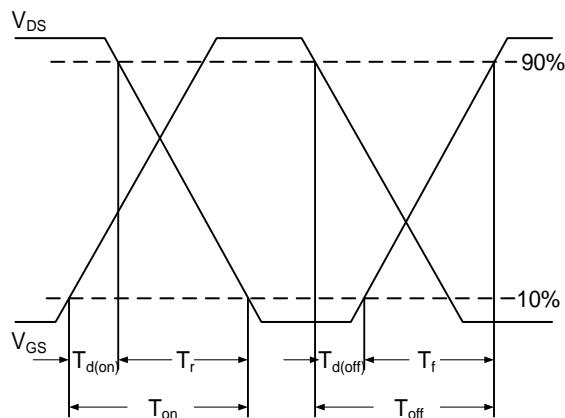
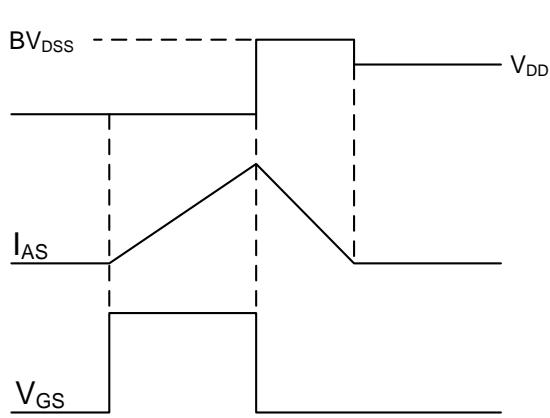
**Drain-Source Diode Characteristics and Maximum Ratings**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$I_s$	Continuous Source Current	$V_G=V_D=0\text{V}$ , Force Current	---	---	280	A
$I_{SM}$	Pulsed Source Current		---	---	560	A
$V_{SD}$	Diode Forward Voltage	$V_{GS}=0\text{V}$ , $I_s=1\text{A}$ , $T_J=25\text{ }^{\circ}\text{C}$	---	---	1	V
$t_{rr}$	Reverse Recovery Time	$V_R=100\text{V}$ , $I_s=10\text{A}$ $di/dt=100\text{A}/\mu\text{s}$ , $T_J=25\text{ }^{\circ}\text{C}$	---	400	---	ns
$Q_{rr}$	Reverse Recovery Charge		---	1.6	---	uC

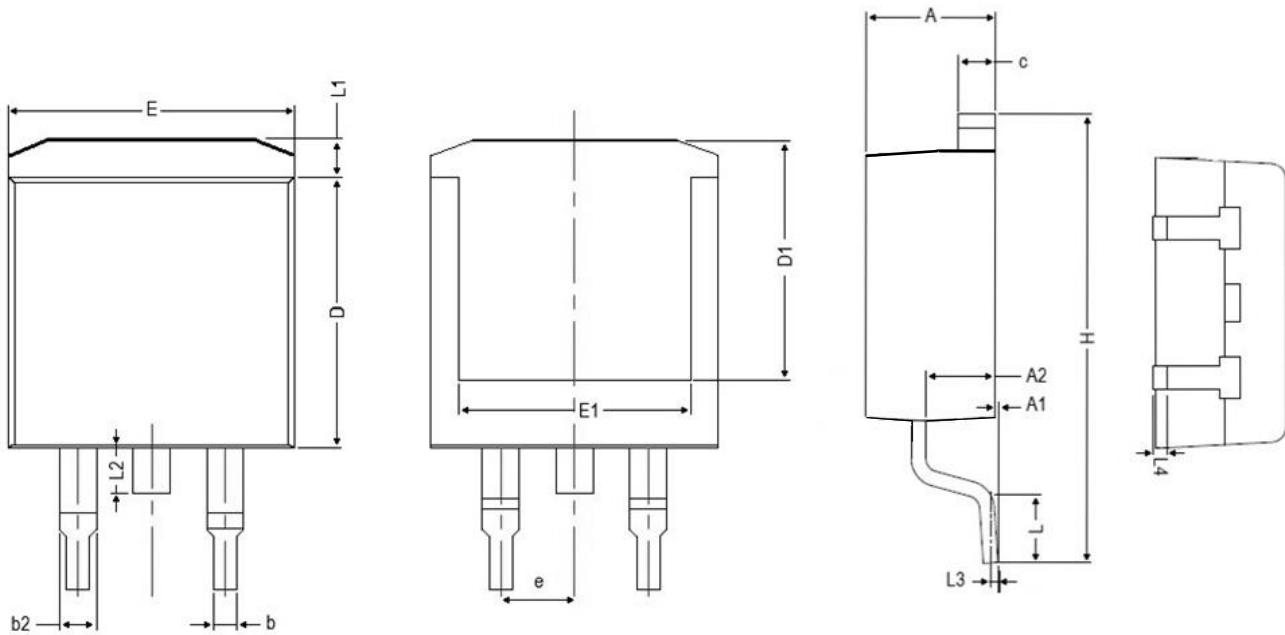
Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2.  $V_{DD}=50\text{V}$ ,  $V_{GS}=10\text{V}$ ,  $L=1\text{mH}$ ,  $I_{AS}=79\text{A}$ ,  $R_G=25\Omega$ , Starting  $T_J=25\text{ }^{\circ}\text{C}$ .
3. The data tested by pulsed , pulse width  $\leq 300\text{us}$  , duty cycle  $\leq 2\%$ .
4. Essentially independent of operating temperature.


**Fig.1 Typical Output Characteristics**

**Fig.2 Continuous Drain Current vs.  $T_c$** 

**Fig.3 Normalized  $R_{DSON}$  vs.  $T_j$** 

**Fig.4 Normalized  $V_{th}$  vs.  $T_j$** 

**Fig.5 Turn-On Resistance vs.  $V_{GS}$** 

**Fig.6 Turn-On Resistance vs.  $I_D$**


**Fig.7 Capacitance Characteristics**

**Fig.8 Gate Charge Characteristics**

**Fig.9 Normalized Transient Impedance**

**Fig.10 Maximum Safe Operation Area**

**Fig.11 Switching Time Waveform**

**Fig.12 EAS Waveform**

## TO263 PACKAGE INFORMATION



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	4.850	4.200	0.191	0.165
A1	0.300	0.000	0.012	0.000
A2	2.900	2.200	0.114	0.087
b	0.950	0.700	0.037	0.028
b2	1.700	1.000	0.067	0.039
c	1.450	1.150	0.057	0.045
D	9.500	8.350	0.374	0.329
D1	9.150	6.400	0.360	0.252
E	10.500	9.600	0.413	0.378
E1	8.900	6.850	0.350	0.270
e	2.540 BSC		0.100 BSC	
H	15.900	14.600	0.626	0.575
L	2.800	1.700	0.110	0.067
L1	1.700	1.050	0.067	0.041
L2	2.100	1.300	0.083	0.051
L3	0.250 BSC		0.010 BSC	
L4	0.750	0.200	0.030	0.008