



General Description

These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

SOT23-3S Pin Configuration



BVDSS	RDS(ON)	ID
30V	25mΩ	5.5A

Features

- 30V, 5.5A, RDS(ON) = 25mΩ @ VGS = 10V
- Improved dv/dt capability
- Fast switching
- 100% EAS Guaranteed
- Green Device Available

Applications

- MB / VGA / Vcore
- Load Switch
- Hand-Held Instrument

Absolute Maximum Ratings $T_c=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	30	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current – Continuous ($T_c=25^\circ\text{C}$)	5.5	A
	Drain Current – Continuous ($T_c=100^\circ\text{C}$)	3.5	A
I_{DM}	Drain Current – Pulsed ¹	22	A
EAS	Single Pulse Avalanche Energy ²	7.32	mJ
IAS	Single Pulse Avalanche Current ²	12.1	A
P_D	Power Dissipation ($T_c=25^\circ\text{C}$)	1.56	W
	Power Dissipation – Derate above 25°C	0.012	W/ $^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	80	$^\circ\text{C}/\text{W}$

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)
Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_{\text{D}}=250\mu\text{A}$	30	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_{\text{D}}=1\text{mA}$	---	0.04	---	$\text{V}/^\circ\text{C}$
$I_{\text{DS}}^{\text{SS}}$	Drain-Source Leakage Current	$V_{\text{DS}}=30\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	1	μA
		$V_{\text{DS}}=24\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=125^\circ\text{C}$	---	---	10	μA
I_{GSS}	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 20\text{V}$, $V_{\text{DS}}=0\text{V}$	---	---	± 100	nA

On Characteristics

$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance ³	$V_{\text{GS}}=10\text{V}$, $I_{\text{D}}=4\text{A}$	---	21	25	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}$, $I_{\text{D}}=2\text{A}$	---	35	45	$\text{m}\Omega$
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$, $I_{\text{D}}=250\mu\text{A}$	1.0	1.6	2.5	V
$\Delta V_{\text{GS}(\text{th})}$	$V_{\text{GS}(\text{th})}$ Temperature Coefficient		---	-4	---	$\text{mV}/^\circ\text{C}$
g_{fs}	Forward Transconductance	$V_{\text{DS}}=10\text{V}$, $I_{\text{D}}=3\text{A}$	---	6.5	---	S

Dynamic and switching Characteristics

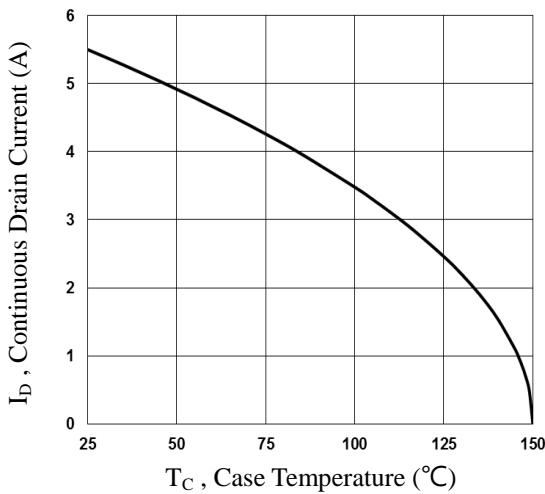
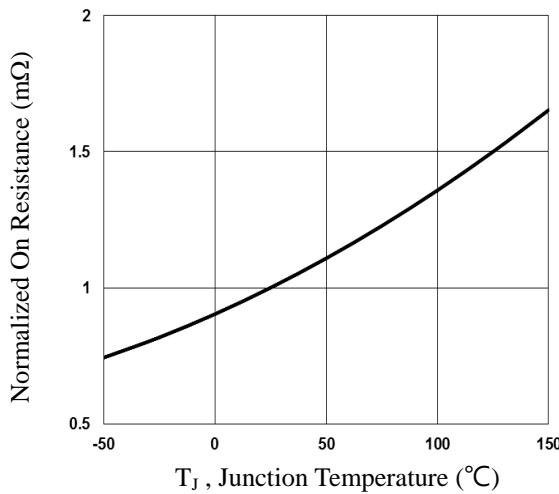
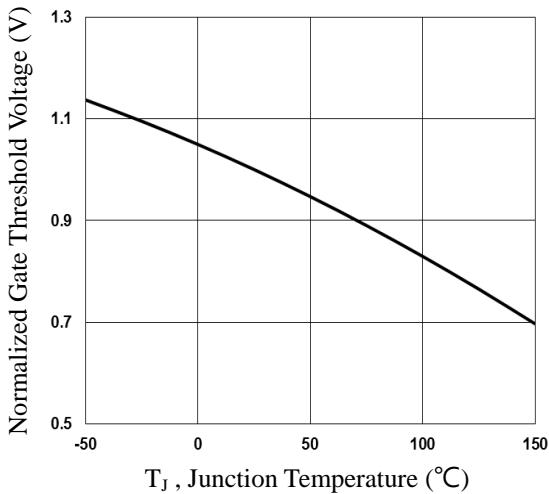
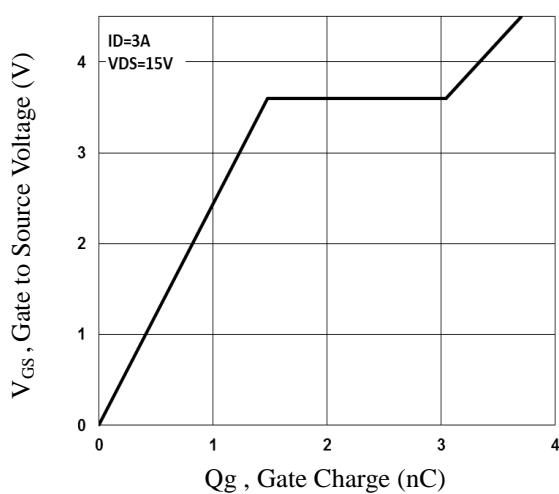
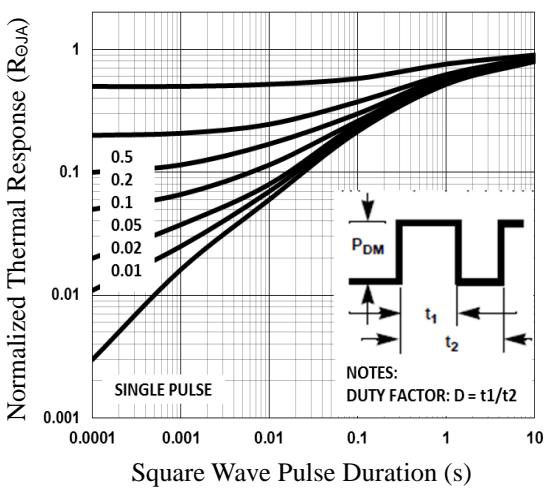
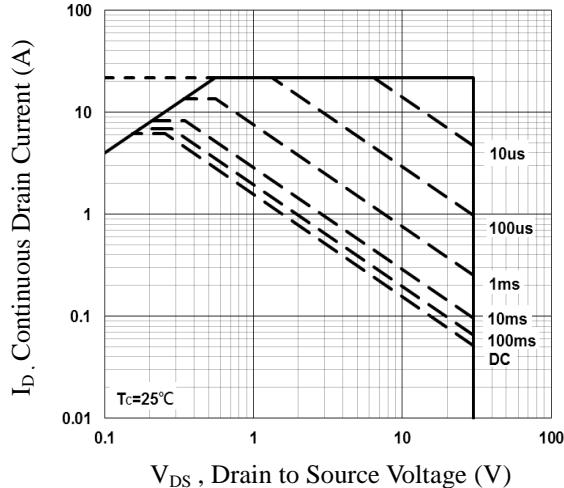
Q_g	Total Gate Charge ^{3, 4}	$V_{\text{DS}}=15\text{V}$, $V_{\text{GS}}=4.5\text{V}$, $I_{\text{D}}=3\text{A}$	---	3.7	7	nC
Q_{gs}	Gate-Source Charge ^{3, 4}		---	1.48	3	
Q_{gd}	Gate-Drain Charge ^{3, 4}		---	1.56	3.5	
$T_{\text{d}(\text{on})}$	Turn-On Delay Time ^{3, 4}	$V_{\text{DD}}=15\text{V}$, $V_{\text{GS}}=10\text{V}$, $R_{\text{G}}=6\Omega$	---	2.6	5	ns
T_r	Rise Time ^{3, 4}		---	8.8	16	
$T_{\text{d}(\text{off})}$	Turn-Off Delay Time ^{3, 4}		---	18.4	35	
T_f	Fall Time ^{3, 4}		---	5.1	10	
C_{iss}	Input Capacitance	$V_{\text{DS}}=15\text{V}$, $V_{\text{GS}}=0\text{V}$, $F=1\text{MHz}$	---	293	520	pF
C_{oss}	Output Capacitance		---	57	100	
C_{rss}	Reverse Transfer Capacitance		---	40	80	
R_g	Gate resistance	$V_{\text{GS}}=0\text{V}$, $V_{\text{DS}}=0\text{V}$, $F=1\text{MHz}$	---	1.15	3	Ω

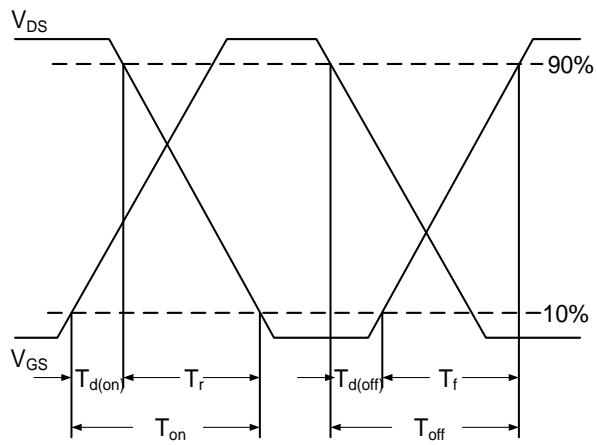
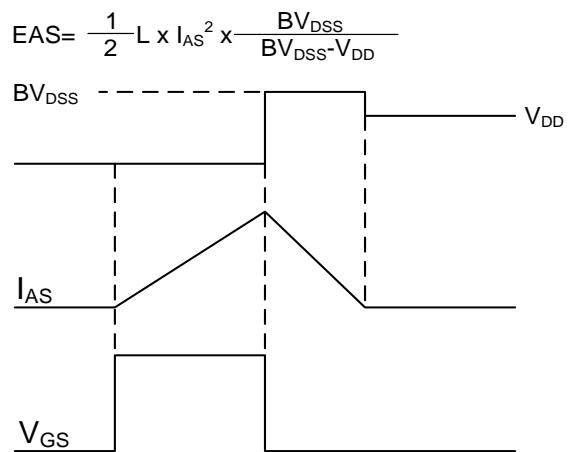
Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current	$V_G=V_D=0\text{V}$, Force Current	---	---	5.5	A
I_{SM}	Pulsed Source Current ³		---	---	11	A
V_{SD}	Diode Forward Voltage ³	$V_{\text{GS}}=0\text{V}$, $I_s=1\text{A}$, $T_J=25^\circ\text{C}$	---	---	1	V

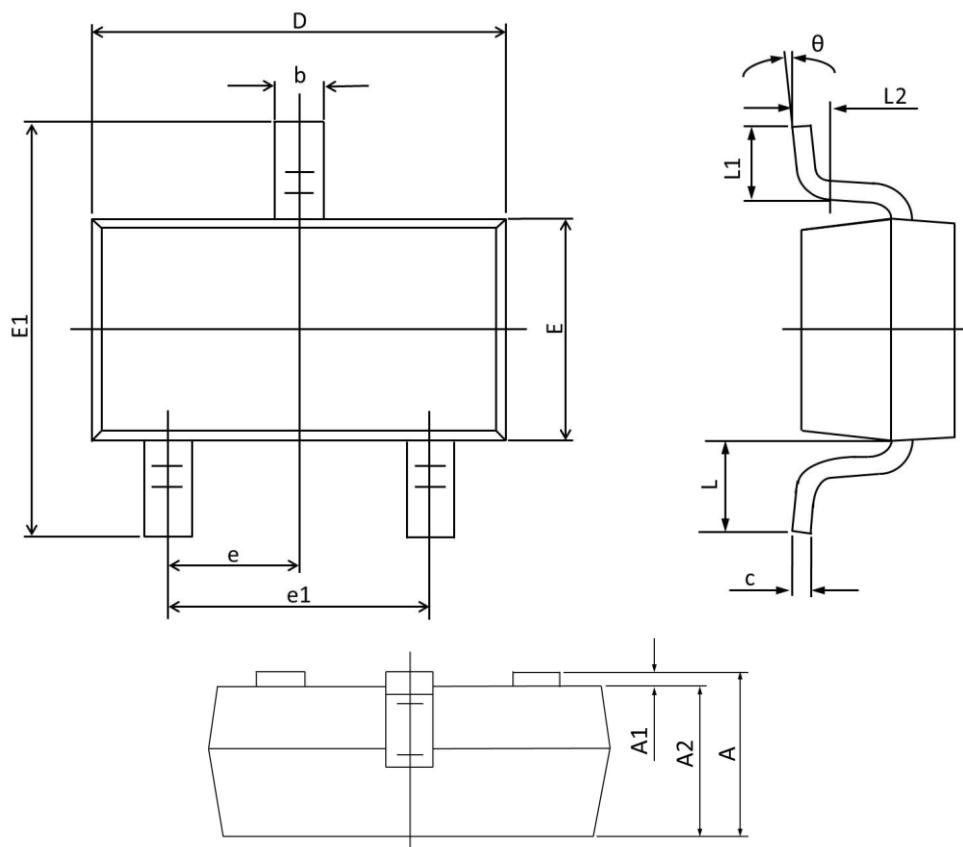
Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. $V_{\text{DD}}=25\text{V}$, $V_{\text{GS}}=10\text{V}$, $L=0.1\text{mH}$, $I_{\text{AS}}=12.1\text{A}$, Starting $T_J=25^\circ\text{C}$.
3. The data tested by pulsed, pulse width $\leq 300\text{us}$, duty cycle $\leq 2\%$.
4. Essentially independent of operating temperature.


Fig.1 Continuous Drain Current vs. TC

Fig.2 Normalized RDS(on) vs. TJ

Fig.3 Normalized V_{th} vs. TJ

Fig.4 Gate Charge Waveform

Fig.5 Normalized Transient Response

Fig.6 Maximum Safe Operation Area


Fig.7 Switching Time Waveform

Fig.8 EAS Waveform

SOT23-3S PACKAGE INFORMATION



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	1.150	0.900	0.045	0.035
A1	0.100	0.000	0.004	0.000
A2	1.050	0.900	0.041	0.035
b	0.500	0.300	0.020	0.012
c	0.150	0.080	0.006	0.003
D	3.000	2.800	0.118	0.110
E	1.400	1.200	0.055	0.047
E1	2.550	2.250	0.100	0.089
e	0.95 TYP.		0.037 TYP.	
e1	2.000	1.800	0.079	0.071
L	0.55 REF.		0.022 REF.	
L1	0.500	0.300	0.020	0.012
L2	0.25 TYP.		0.01 TYP.	
θ	8°	0°	8°	0°